

DARKLITE® ARE/5AA

recessed accent light



FEATURES

Darklite ARE/5AA is a 5" aperture adjustable angle accent light designed for use with a 12-volt, G53 base, AR111-shaped retrofit lamps (by others) including:

- Philips 11 watt 11AR111/LED... includes an 8° beam
16 watt 16AR111/LED... includes a 25° beam
20 watt 20AR111/LED... includes a 15° beam
- SORAA 6.0 watt Brilliant or Vivid a 4° beam
12.5 watt Brilliant or Vivid includes an 8° beam
18.5 watt Brilliant or Vivid includes a 9° beam

Fixture has 0-35° angular adjustment with 358° horizontal rotation with lockable focus. When adjusted for downlighting (0°), lamp is centered within reflector. Precise reflector design minimizes aperture brightness. Recess depth in only 8".

A 120-/12-volt electronic transformer is standard. A 277-/12-volt electronic transformer is available as an option.

Three reflector cuts are available – 0°, 20° and 30° – to minimize sightlines from below into the fixture.

If used with one of the five lamps above which draw less than 20 watts, fixture accepts one or two of a number of Optical Accessories including lenses, color filters and screens.

Reflectors are available in three clear natural aluminum finishes — semi-specular (C), slightly diffuse (V) or fully diffuse (EC) — as well as champagne gold or black Alzak®. Other reflector finishes are available on special order.

Darklite ARE/5AA includes a pair of mounting bars (3/4" x 27" C channel). Specialty bars for wood joist and T-bar installations are also available.

For more information, [click here](#).

APPLICATIONS


Fixture is recommended for directional accent and display highlighting in stores, offices, museums, restaurants, showrooms and residences.

Fixture is cULus listed for Damp Location. Fixture is prewired with thermal protector, suitable for use in a fire rated ceiling and approved for ten #12 wire 75°C branch circuit pull-through wiring. Junction box and transformer are accessible through the aperture of the fixture.



LAMP (BY OTHERS) DIMMING INFO

Edison Price Lighting does not include lamps and does not sell either lamps or their accessories. For dimming compatibility consult the lamp manufacturer's website.

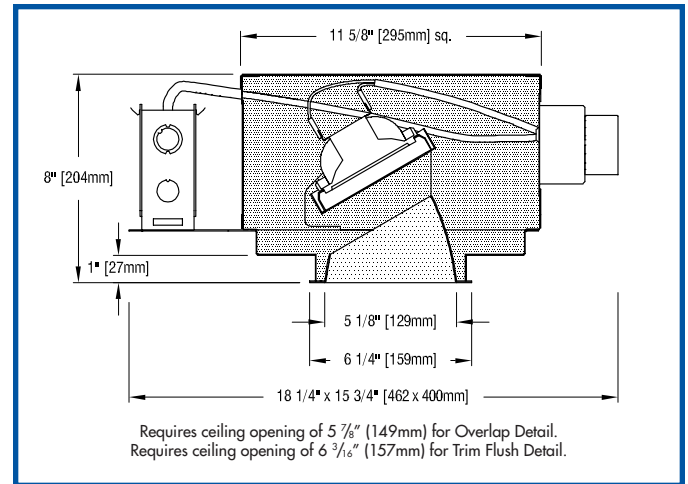

PRODUCT CODE

For complete product code, list basic unit and select one item from each following box.

Basic Unit	DL-ARE-5AA	
Reflector Type		
Downlight	0	
0 – 20° angular adjustment	20	
20 – 35° angular adjustment	30	
Reflector Color and Detail	Overlap	Trim Flush*
Semi-specular Clear	COL	CTF
Slightly diffuse Clear	VOL	VTF
Fully diffuse Clear	ECOL	ECTF
Champagne Gold	GOL	GTF
Black	BOL	BTF
Other reflector finishes are available on special order.		
Overlap Flange continues reflector finish. White painted flanges and custom painted flanges are available on special order. Add WF (white flange) or CCF (custom color flange).		
*Trim Flush reflector trim requires the use of a plaster ring Accessory (see below).		
▶ Reflectors detailed for metal or wood ceilings available on special order.		

OPTIONS Specify by adding to the basic unit.

Integral 277/12 volt electronic transformer	– SS277
---	---------

ACCESSORIES Specify as a separate line item.

Plaster ring allows use of 5 7/8" OD Trim Flush (-TF) reflector in sheetrock ceiling; 6 3/16" dia hole required.....	TF RING/5
--	-----------

OPTICAL ACCESSORIES ▶ over, please



OPTICAL ACCESSORIES

Specify as separate line items.

All are 4 3/4" (121mm) dia. Lenses and filters are glass; screens are aluminum.

30° spread lens	<i>not for use wih Philips 20-watt lamps</i>	LENS/4.75-30
20° x 55° spread lens	<i>not for use wih Philips 20-watt lamps</i>	LENS/4.75
70° spread lens	<i>not for use wih Philips 20-watt lamps</i>	LENS/4.75-70
prismatic lens (Solite)	<i>not for use wih Philips 20-watt lamps</i>	PLS/4.75
40° x 70° spread lens	<i>not for use wih Philips 20-watt lamps</i>	LENS/4.75-4070
beam smoother	<i>not for use wih Philips 20-watt lamps</i>	CLR/4.75
UV filter	<i>not for use wih Philips 20-watt lamps</i>	UVF/4.75
color filters		
Daylight Blue	<i>not for use wih Philips 20-watt lamps</i>	DAY/4.75
Surprise Pink	<i>not for use wih Philips 20-watt lamps</i>	PNK/4.75
amber	<i>not for use wih Philips 20-watt lamps</i>	AMB/4.75
blue	<i>not for use wih Philips 20-watt lamps</i>	BLU/4.75
green	<i>not for use wih Philips 20-watt lamps</i>	GRN/4.75
red	<i>not for use wih Philips 20-watt lamps</i>	RED/4.75
33% light reduction screen	<i>not for use wih Philips 20-watt lamps</i>	SCR33/4.75
50% light reduction screen	<i>not for use wih Philips 20-watt lamps</i>	SCR50/4.75

For current lamp performance data, consult lamp manufacturer's website.