

ARTIMA® 20 O

track mounted accent light



FEATURES

Artima 20 O is an accent light designed for use with PAR-20 flood or spot lamps (50-watt maximum). Fixture may be mounted on and powered by any of eighteen 20-amp 120-volt Edison Price Lighting track systems.

The optical assembly for Artima 20 O is a matte black cross-baffle which reduces spill light and controls lamp brightness. This optical assembly, and its settings, are entirely undisturbed by relamping.

A socket cap prevents any backsplash of light onto the ceiling.

Artima 20 fixtures provide 385° horizontal rotation and vertical adjustment from 0° to 90°. Lamp focus can be locked by tightening two collar clamps using $\frac{3}{32}$ " and $\frac{7}{64}$ " hex keys.

Artima 20 fixtures accept one or two of a number of Optical Accessories including spread lenses, a beam smoother, a UV filter, color filters and light reduction screens. We especially recommend the addition of one of our spread lenses when using the Artima 20 O for critical display functions.

Because their track adapters are entirely concealed within the track, Artima fixtures have an exceptionally clean appearance. Standard finish is matte white with a white socket lead; also available in black and Industrial Silver matte paint finishes.


APPLICATIONS



Fixture is suitable for highlighting vertical or horizontal surfaces, as well as objects in museums, galleries, showrooms, residences, offices and stores.

Fixture is listed for mounting on Edison Price Lighting 120-volt track only.

For the outlet box mounted version of this fixture, see **Artima 20 O-OBM**.

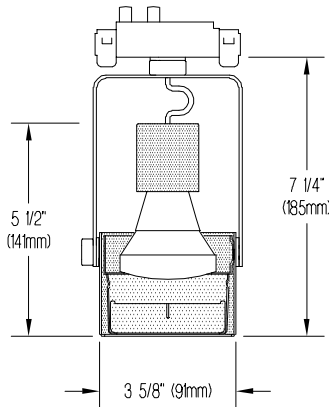

PRODUCT CODE

Complete Product Code..... ART 20 O
standard finish: matte white with white socket lead

OPTIONS

Specify by adding to the product code.

rocker type **on/off switch** in track adapter – SW
($\frac{3}{4}$ " long adapter lengthened to $\frac{7}{16}$ " to accommodate switch)

equipped for **outlet box mounting** with
a $4\frac{1}{2}$ " (114mm) dia matte white box cover;
mounts directly to a standard 4" (102mm)
octagonal outlet box – OBM

matte black housing finish – BLK
black socket lead

Industrial Silver housing finish – SIL
black socket lead

custom color paint housing finish
specify white or black socket lead – WSLV or – BSLV
and identify color in specification CCH

OPTICAL ACCESSORIES

Specify as separate line items.

All are $2\frac{3}{4}$ " (70mm) dia. Lenses and filters are glass; screens are aluminum.

diffuse glass DGS/2.75

prismatic lens (Solite) PLS/2.75

55° spread lens LENS/2.75

40° x 70° spread lens LENS/2.75-4070

beam smoother CLR/2.75

UV filter UVF/2.75

color filters

Daylight Blue DAY/2.75

Surprise Pink PNK/2.75

amber AMB/2.75

blue BLU/2.75

green GRN/2.75

red RED/2.75

33% light reduction screen SCR33/2.75


50% light reduction screen SCR50/2.75

► For fixtures configured for 50A track or 60A busway systems, contact factory.



ARTIMA 20 O

PHOTOMETRIC REPORT – SPOT


 Report No. 56500. Original Independent Testing Laboratories, Inc. (ITL) test report furnished upon request.

Luminaire.....track mounted adjustable accent light with 55° spread lens; black cross-baffle aimed at nadir (0°)


Lamp.....50-watt halogen PAR20 NSP9, 550 lumens

Efficiency.....42.8%

CANDLEPOWER DISTRIBUTION

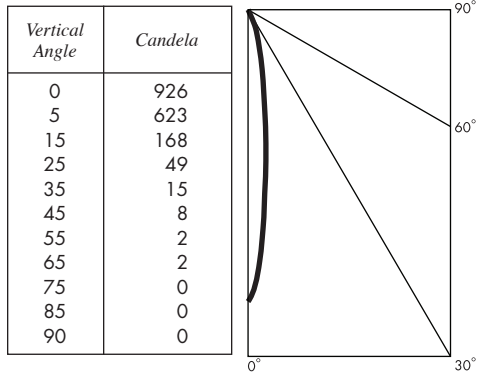

PHOTOMETRIC REPORT – FLOOD

 Report No. 56498. Original Independent Testing Laboratories, Inc. (ITL) test report furnished upon request.

Luminaire.....track mounted adjustable accent light with 55° spread lens; black cross-baffle aimed at nadir (0°)

Lamp.....50-watt halogen PAR20 WFL40, 550 lumens

Efficiency.....39.9%

CANDLEPOWER DISTRIBUTION

