





track fixtures



AESTHETICS	ARCHITECTURAL <i>Clean lines; blends into architecture.</i>
MODELS	COMPREHENSIVE <i>Accent light, narrow spot, and wallwasher share features and form.</i>
VERY NARROW SPOT	4° TO 5° BEAM SPREAD <i>Tight beams, up to 149,800 CBCP without light spill.</i>
MAX LUMENS	MULTI-STORY POWER <i>Up to 7200 lm</i>
INPUT WATT	HIGH EFFICACY <i>As high as 92 lm/w</i>
DIMMING	ADVANCED <i>As low as 0.1%</i> <i>Wireless Bluetooth, ELV, Incandescent, and Lutron 2-wire drivers</i> <i>Individual integral dimmer for 120v and 277v.</i>
WIRELESS CONTROLS	COMPATIBLE <i>Wireless wall switches, sensors, and control systems.</i>
LENS CARTRIDGE	ONE-HANDED <i>One-handed insertion and removal, thanks to ball springs.</i>
LOCKABLE FOCUS	CONVENIENT <i>One-handed 'lever lock' on MiniMax. Allen key locking on Artima fixtures.</i>
BEAMSPREADS	INTERCHANGEABLE <i>'Twist and lock' reflectors change beamspreads onsite.</i>
FUNCTIONS	INTERCHANGEABLE <i>Cross baffle, Ring baffle, and/or Lens holder may be changed on-site.</i>
CONTENT DELIVERY	EMBEDDED BLUETOOTH BEACON <i>Sends push notifications to nearby devices (Bluetooth models)</i>

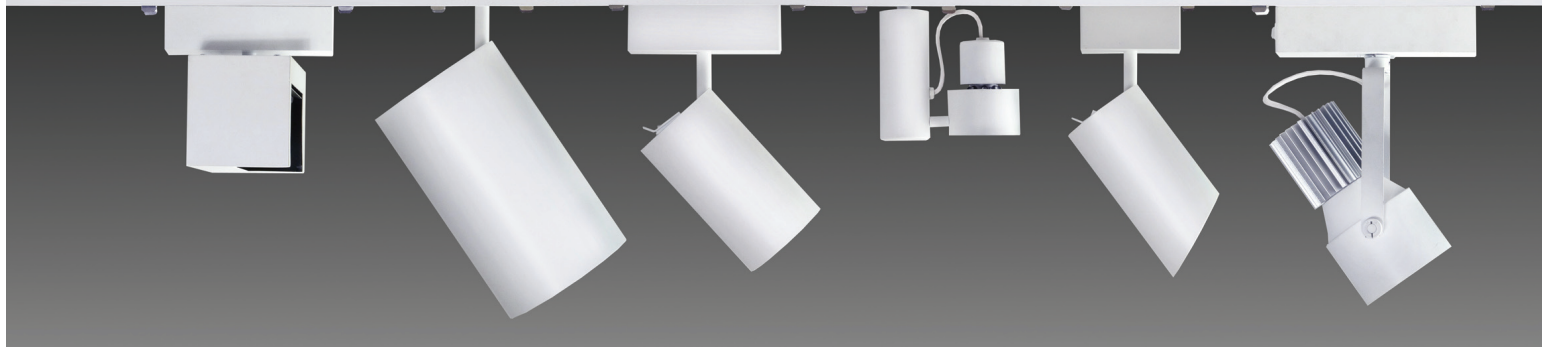

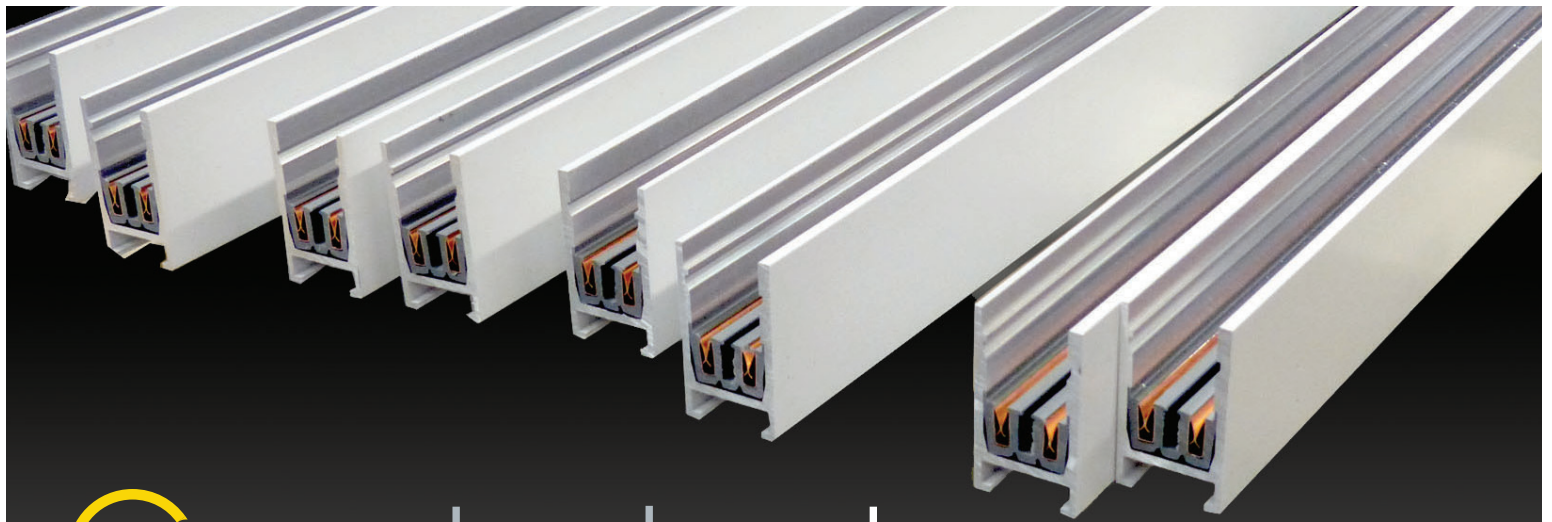

EDISON PRICE LIGHTING track systems

MOUNTING

COMPREHENSIVE

120V and 277V track available recessed (flangeless or flanged), surface mounted, pendant or aircraft cable mounted.

WALL MOUNTING

PRODUCT CODE PROVIDED

Add +DBL HANGERS to product code on most models.

TRACK WITH UPLIGHT

UNIFORM AND POWERFUL

Continuous LED, up to 926 lumens per linear foot.

FIXTURE SUPPORT

TWO STAINLESS STEEL SPRINGS

Supports up to 200 lbs.

FIXTURE INSERTION & REMOVAL

ONE-HANDED

One-handed insertion and removal, thanks to stainless steel springs.

TRACK ELECTRICAL CONNECTION

V-SHAPED BUSBAR

Reduced chance of arcing or overheating, thanks to dependable connection with track adapter blades.

SUSTAINABLE TRACK ADAPTER

ALL-STEEL STEM & ADAPTER PLATE

Unbreakable

CIRCUIT SELECTION

CONVENIENT

Remove, rotate 180°, and reinsert track fixture, thanks to symmetrical track conductors.

MODIFICATIONS

AVAILABLE

Contact Technical Sales (techsales@epl.com)

WIDTH

THIN

3/4" wide recessed flangeless track

1" wide surface track

1-7/8" wide recessed flanged track

