

# CHP WAFER PRIM SQUARE/3 AA

recessed shallow trimless Chicago Plenum LED accent light


FULLY SUSTAINABLE – FULLY SUSTAINABLE – FULLY SUSTAINABLE – FULLY SUSTAINABLE – FULLY SUSTAINABLE – FULLY SUSTAINABLE – FULLY SUSTAINABLE



## FEATURES

- **CHP WAFER PRIM SQUARE/3 AA is a 3" aperture LED accent light** designed for use in a Chicago Plenum ceiling. **Recess depth is only 4 3/4"** (housing depth of 3 3/4" plus a 1" throat).
- **Luminaire is powered by Cree chip-on-board LED's** providing CRI's of 80+ and 90+. See tables below for wattages and efficacies.
- **Luminaire is exclusively designed for installation in sheet rock** to achieve a flush trim detail. Installation includes the application of drywall compound over the luminaire's integral spackle screen to the rim of its integral plaster ring.
- **Luminaire provides 365° rotation and 0°-30° angular adjustment.** Once focused, adjustment may be locked by a lever and a thumb nut.
- **Luminaire employs an internal 'twist and lock' lens** to produce an initial beam-spread of either 12°, 20° or 36°. To allow beam-spread to be changed in installed luminaires, internal lenses are available as accessories.
- **Luminaire accepts one of a number of Optical Accessories** including lenses and color filters.
- **External reflector is designed to accept** a clear glass (-GLS) or a Solite-pattern prismatic lens (-PRS). External reflectors are available in two clear natural aluminum finishes – slightly diffuse (V) or fully diffuse (EC) – as well as black and white.
- **Fixture includes a pair of mounting bars** (3/4" x 27" C channel). Specialty bars for wood and T-bar installations are also available.
- **For more information, [click here](#).**

## APPLICATIONS

Luminaire is  listed as an inherently protected luminaire for Damp Location and is additionally listed for City of Chicago Environmental Air (CCEA). Luminaire is RoHS compliant and is suitable for use in a fire rated ceiling. Removal of the external reflector allows access to the LED module, driver and junction box.

## OPTICAL ACCESSORIES Specify as separate line

All are 2 3/4" (70mm) diameter. Lenses and filters are glass; screens are aluminum.

diffuse glass .....	DGS/2.375
prismatic lens (Solite) .....	PLS/2.375
55° spread lens .....	LENS/2.375
40° x 70° spread lens .....	LENS/2.375-4070
beam smoother .....	CLR/2.375
33% light reduction screen .....	SCR33/2.375
50% light reduction screen .....	SCR50/2.375
<b>color filters</b>	
surprise pink .....	PNK/2.375
daylight blue .....	DAY/2.375
amber .....	AMB/2.375
blue .....	BLU/2.375
green .....	GRN/2.375
red .....	RED/2.375

## PRODUCT CODE

For complete product code, list basic unit and select one item from each following box.

<b>Basic Unit</b> .....	WP3CHP-CLTAA
<b>Internal Lens</b> <i>Choose one.</i>	
12° initial beamspread .....	- 12D
20° initial beamspread .....	- 20D
36° initial beamspread .....	- 36D
<b>Light Source Output (Lumens)</b>	
800 lumens / CRI 90+ .....	4000K not available ..... - L08H
1000 lumens .....	4000K not available ..... - L10H
1200 lumens .....	4000K not available ..... - L12H
1000 lumens / CRI 80+ .....	- L10S
1200 lumens .....	- L12S
1500 lumens .....	- L15S
<b>Driver</b>	
dimmable to 1% by a 0-10V dimmer on 120 Or 277-volt service .....	- DMV
dimmable to 5% by either an incandescent or electronic low voltage dimmer only; 120-volt service only .....	- DMP
dimmable to 1% by a 2-wire Lutron compatible dimmer .....	- DMHU
dimmable to 1% SoftOn/FadeToBlack by a Lutron EcoSystem control ....	- ECO-LU
eldoLED 0-10V (Logarithmic) driver dimmable to 0.1% with a 0-10V dimmer .....	- DVOELG
eldoLED 0-10V (Linear) driver dimmable to 0.1% with a 0-10V dimmer .....	- DVOELN
eldoLED driver dimmable to 0.1% with DALI control system .....	- DA0-EL
<b>Light Color</b>	
2700 K .....	- 27K
3000 K .....	- 30K
3500 K .....	- 35K
4000 K .....	- 40K


External Reflector Color & Trim	GLS Clear Glass	PRS Prismatic Lens
Slightly diffuse clear	GLS-VTL	PRS-VTL
Diffuse clear	GLS-ECTL	PRS-ECTL
Black	GLS-BTL	PRS-BTL
White	GLS-WTL	PRS-WTL

## OPTIONS Specify by adding to the basic unit.

<b>Energy Star labelling</b> available on some models; see the Energy Star info 'box' on this page .....	- ESL
--	-------

## EXTRA INTERNAL LENSES Specify as separate line items.


<b>12° internal lens</b> .....	CLT-LENS12-50
<b>20° internal lens</b> .....	CLT-LENS20-50
<b>36° internal lens</b> .....	CLT-LENS36-50



**ENERGY STAR**  
Energy Star qualified under Luminaires Specification V2.0. See Energy Star website for model numbers included in listing. The following options are not qualified: L08H, L15S, 12D and 20D. On orders which require Energy Star labelling, add "-ESL" to the specified Product Code.



Requires ceiling opening of 4" (102mm) square in a drywall ceiling.

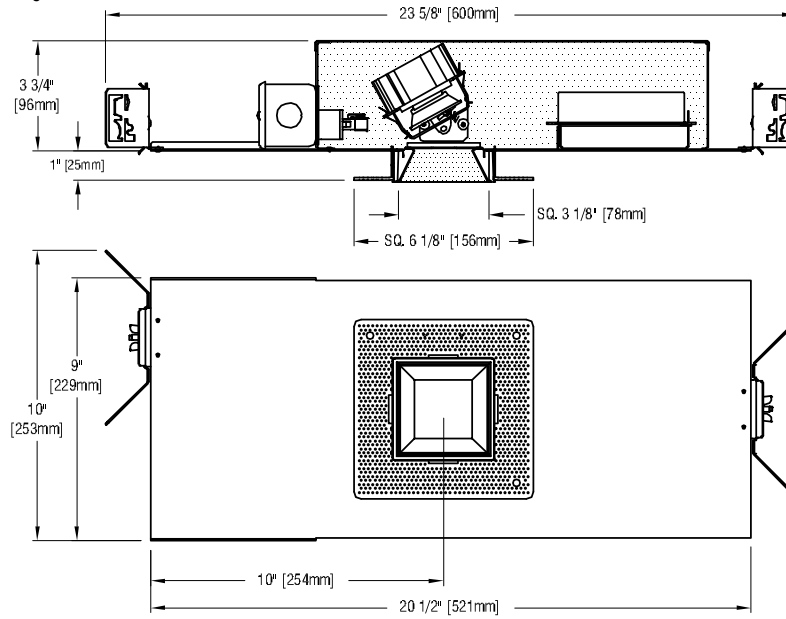

## STANDARD DMV DRIVER INFORMATION (UL Class 2, dry and damp location)

Voltage	120	277
Input Watts <small>(L08H/L10H/L12H/L10S/L12S/L15S)</small>	9/10/13/9/10/13	9/10/13/9/10/13
Input Current (A) <small>(L08H/L10H/L12H/L10S/L12S/L15S)</small>	08/08/11/08/08/11	04/04/06/04/04/06
Output Current (mA)	220-350	220-350
Min. Power Factor	.99	.99
Operating Temperature Range (F)	-13 to 122	-13 to 122

## LIGHT OUTPUT MULTIPLIER

LED Light Engine	Light Output Multiplier
800 Lumens 90 CRI	0.84*
1000 Lumens 90 CRI	1
1200 Lumens 90 CRI	1.23*
1000 Lumens 80 CRI	1.04*
1200 Lumens 80 CRI	1.24*
1500 Lumens 80 CRI	1.53*

\*estimated values

## REFLECTOR COLOR MULTIPLIERS

Slightly diffuse clear (V)	1
Fully diffuse clear (EC)	.90
Specular white (W)	.70
Black (B)	.40

– photometrics continued below –




## PHOTOMETRIC REPORT with 12° internal lens and clear glass (GLS) (tested per IESNA LM-79-2008)

Prorated from Verification Services Report No. 12269958.01. Original test report furnished upon request.

Luminaire ..... recessed LED square accent light with semi-specular clear aluminum reflector and clear glass, LED aimed at 15° above vertical.+  
 Light Source ..... Cree CXB1310 LED with 12° beam spread integral lens, 2700K CCT, 90 CRI, 1000 lumens

### CANDLEPOWER DISTRIBUTION (Candela)

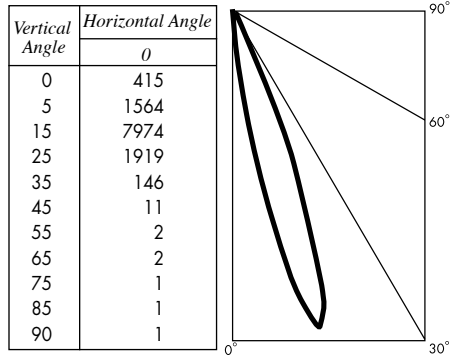

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Light Engine	Luminaire Light Output	Luminaire CBCP	Luminaire Efficacy (lms/watt)	System Wattage
800 Lumens 90 CRI	489*	6698*	55*	9
1000 Lumens 90 CRI	582	7974	55	10
1200 Lumens 90 CRI	716*	9808*	55*	13
1000 Lumens 80 CRI	605*	8293*	67*	9
1200 Lumens 80 CRI	722*	9888*	72*	10
1500 Lumens 80 CRI	890*	12,200*	68*	13


\*estimated values

## PHOTOMETRIC REPORT with 12° internal lens and prismatic lens (PRS) (tested per IESNA LM-79-2008)

Prorated from Verification Services Report No. 12269958.02. Original test report furnished upon request.

Luminaire ..... recessed LED square accent light with semi-specular clear aluminum reflector and prismatic lens, LED aimed at 15° above vertical.+  
 Light Source ..... Cree CXB1310 LED with 12° beam spread integral lens, 2700K CCT, 90 CRI, 1000 lumens

### CANDLEPOWER DISTRIBUTION (Candela)

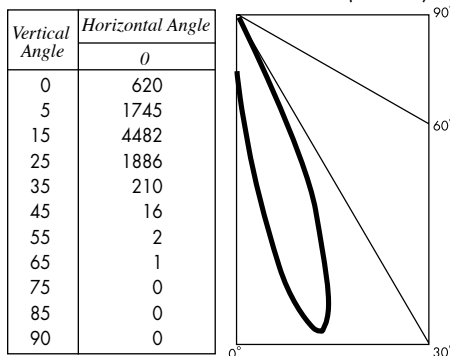

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Light Engine	Luminaire Light Output	Luminaire CBCP	Luminaire Efficacy (lms/watt)	System Wattage
800 Lumens 90 CRI	474*	3765*	53*	9
1000 Lumens 90 CRI	564	4482	54	10
1200 Lumens 90 CRI	694*	5513*	53*	13
1000 Lumens 80 CRI	587*	4661*	65*	9
1200 Lumens 80 CRI	699*	5558*	70*	10
1500 Lumens 80 CRI	863*	6857*	66*	13


\*estimated values

## PHOTOMETRIC REPORT with 20° internal lens and clear glass (GLS) (tested per IESNA LM-79-2008)

Prorated from Verification Services Report No. 12269958.03. Original test report furnished upon request.

Luminaire ..... recessed LED square accent light with semi-specular clear aluminum reflector and clear glass, LED aimed at 15° above vertical.+  
 Light Source ..... Cree CXB1310 LED with 20° beam spread integral lens, 2700K CCT, 90 CRI, 1000 lumens

### CANDLEPOWER DISTRIBUTION (Candela)

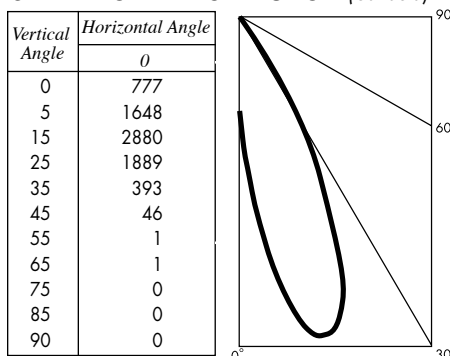

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Light Engine	Luminaire Light Output	Luminaire CBCP	Luminaire Efficacy (lms/watt)	System Wattage
800 Lumens 90 CRI	491*	2419*	55*	9
1000 Lumens 90 CRI	584	2880	56	10
1200 Lumens 90 CRI	718*	3542*	55*	13
1000 Lumens 80 CRI	607*	2995*	67*	9
1200 Lumens 80 CRI	724*	3571*	72*	10
1500 Lumens 80 CRI	894*	4406*	69*	13


\*estimated values

## PHOTOMETRIC REPORT with 20° internal lens and prismatic lens (PRS) (tested per IESNA LM-79-2008)

Prorated from Verification Services Report No. 12269958.04. Original test report furnished upon request.

Luminaire ..... recessed LED square accent light with semi-specular clear aluminum reflector and prismatic lens, LED aimed at 15° above vertical.+  
Light Source ..... Cree CXB1310 LED with 20° beam spread integral lens, 2700K CCT, 90 CRI, 1000 lumens

### CANDLEPOWER DISTRIBUTION (Candela)

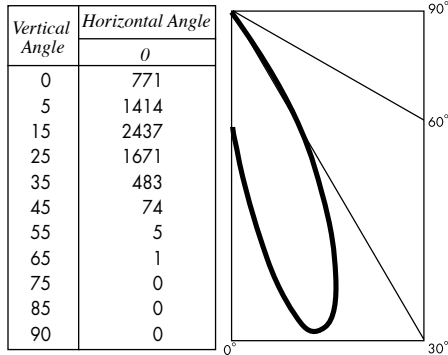

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Light Engine	Luminaire Light Output	Luminaire CBCP	Luminaire Efficacy (lms/watt)	System Wattage
800 Lumens 90 CRI	486*	2047*	54*	9
1000 Lumens 90 CRI	579	2437	55	10
1200 Lumens 90 CRI	712*	2998*	55*	13
1000 Lumens 80 CRI	602*	2534*	67*	9
1200 Lumens 80 CRI	718*	3022*	72*	10
1500 Lumens 80 CRI	886*	3729*	68*	13


\*estimated values

## PHOTOMETRIC REPORT with 36° internal lens and clear glass (GLS) (tested per IESNA LM-79-2008)

Prorated from Verification Services Report No. 12269958.05. Original test report furnished upon request.

Luminaire ..... recessed LED square accent light with semi-specular clear aluminum reflector and clear glass, LED aimed at 15° above vertical.+  
Light Source ..... Cree CXB1310 LED with 36° beam spread integral lens, 2700K CCT, 90 CRI, 1000 lumens

### CANDLEPOWER DISTRIBUTION (Candela)

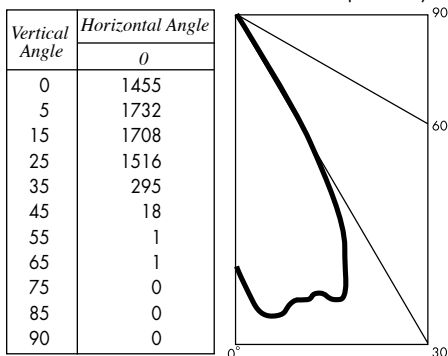

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Light Engine	Luminaire Light Output	Luminaire CBCP	Luminaire Efficacy (lms/watt)	System Wattage
800 Lumens 90 CRI	542*	1511*	60*	9
1000 Lumens 90 CRI	645	1799	62	10
1200 Lumens 90 CRI	793*	2213*	61*	13
1000 Lumens 80 CRI	671*	1871*	75*	9
1200 Lumens 80 CRI	800*	2231*	80*	10
1500 Lumens 80 CRI	987*	2752*	76*	13


\*estimated values

## PHOTOMETRIC REPORT with 36° internal lens and prismatic lens (PRS) (tested per IESNA LM-79-2008)

Prorated from Verification Services Report No. 12269958.06. Original test report furnished upon request.

Luminaire ..... recessed LED square accent light with semi-specular clear aluminum reflector and prismatic lens, LED aimed at 15° above vertical.+  
Light Source ..... Cree CXB1310 LED with 36° beam spread integral lens, 2700K CCT, 90 CRI, 1000 lumens

### CANDLEPOWER DISTRIBUTION (Candela)

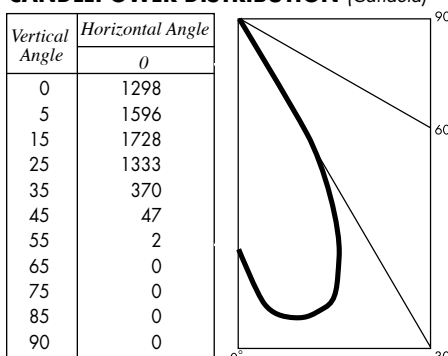

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Light Engine	Luminaire Light Output	Luminaire CBCP	Luminaire Efficacy (lms/watt)	System Wattage
800 Lumens 90 CRI	538*	1457*	60*	9
1000 Lumens 90 CRI	640	1735	61	10
1200 Lumens 90 CRI	787*	2134*	61*	13
1000 Lumens 80 CRI	666*	1804*	74*	9
1200 Lumens 80 CRI	794*	2151*	79*	10
1500 Lumens 80 CRI	979*	2655*	75*	13

\*estimated values