

# MINIMAX™ O LH-OBM BLUETOOTH

surface mounted addressable LED open-aperture accent light



- Luminaire is equipped with a Xicato XIM Gen4 LED module, an IOT device with embedded micro-processor and Bluetooth Low Energy chip, controllable via a smart device with iOS or Windows based apps. Features include
  - standard Bluetooth Wireless connectivity
  - addressable individually
  - on/off control
  - dimming to 0.1%. Combination with integral rotary dimmer available as modification.
  - data collection and storage for power consumption and LED performance
  - direct listening to switches and sensors
  - embedded Eddystone, iBeacon and/or AltBeacon beacons
- Quick Change Cartridge accepts one or two [Optical Accessories](#), including spread lenses, color filters and screens. A complimentary Beam Smoother is included.
- Beam spread is changed by removing the Quick Change Cartridge, replacing one 'twist and lock' [reflector](#) with another, and replacing the cartridge. Luminaire is ordered with a single reflector; one or both of the other reflectors may be ordered as accessories.
- A concealed swivel provides 385° horizontal rotation and vertical adjustment from 0° to 90°. The swivel is permanently tensioned, allowing luminaire to remain fixed at any angle. Luminaire can be locked in place by depressing a hinged ('lever lock') bar so that it lies flush with the top of the housing. Lifting the lever lock frees the swivel.
- MiniMax luminaires have seamless aluminum housings and cast aluminum tops for lightweight durability and heat dissipation. Standard finish is matte white; also available in black and silver matte paint finishes.
- For more information, [click here](#).

## MODIFICATIONS AVAILABLE

Contact factory with quantity for pricing; orders may require shop drawing approval.  
 For modified stem lengths up to 72", add the following to the end of the product code:  
 + number of inches.

MiniMax O LH-OBM Bluetooth is an accent light designed for mounting on a 4" octagonal outlet box (by others). Luminaire is powered by one of a number of Xicato XIM Gen4 19mm LED modules – including 98 CRI Artist Series modules – all of which are distinguished by extraordinary color consistency (within 1x2-step MacAdam ellipse). See tables below for wattages and efficacies.

## PRODUCT CODE

For complete product code, list basic unit and select one item from each following box.

Basic Unit ..... MM-XIM-OB-OH

### Finish

white paint finish ..... - WH  
 black paint finish ..... - BL  
 Industrial Silver paint finish ..... - SI  
 custom color paint finish..... identify color in specification ..... - CC

### Beam Spread Reflector (specify one to ship with fixture)

21° spot ..... - 21D  
 43° flood ..... - 43D  
 60° wide flood ..... - 60D

### Light Source Output

1300 lumens / CRI 98 Artist..... - 13A  
 1300 lumens / CRI 80+ standard..... - 13S  
 1300 lumens / CRI 80+ Vibrant ..... 3000K only ..... -13V

### Light Color

2700 K..... - 27K  
 3000 K..... - 30K  
 3500 K ..... - 35K  
 4000 K..... - 40K

### Circuit Limitations

Luminaire operates only on circuits with
 

- no dimmer on the circuit – or –
- a 0-10V dimmer on the circuit.

## EXTRA REFLECTORS *Specify as separate line items.*

21° spot reflector ..... XTM-REF21-70  
 43° flood reflector..... XTM-REF43-70  
 60° wide flood reflector ..... XTM-REF60-70

### USB Key

To address this fixture from a Windows-based PC, laptop or tablet, a USB key (dongle) is required. Contact factory for USB key.

## OPTICAL ACCESSORIES ▼ *See next page*




## OPTICAL ACCESSORIES

Specify as separate line items.

All are 2 3/4" (70mm) dia. Lenses and filters are glass; screens are aluminum.

<b>diffuse glass</b> .....	DGS/2.75
<b>prismatic lens (Solite)</b> .....	PLS/2.75
<b>55° spread lens</b> .....	LENS/2.75
<b>40° x 70° spread lens</b> .....	LENS/2.75-4070
<b>beam smoother included with fixture</b> .....	CLR/2.75
<b>color filters</b>	
Daylight Blue .....	DAY/2.75
Surprise Pink .....	PNK/2.75
amber .....	AMB/2.75
blue .....	BLU/2.75
green .....	GRN/2.75
red .....	RED/2.75
<b>33% light reduction screen</b> .....	SCR33/2.75
<b>50% light reduction screen</b> .....	SCR50/2.75

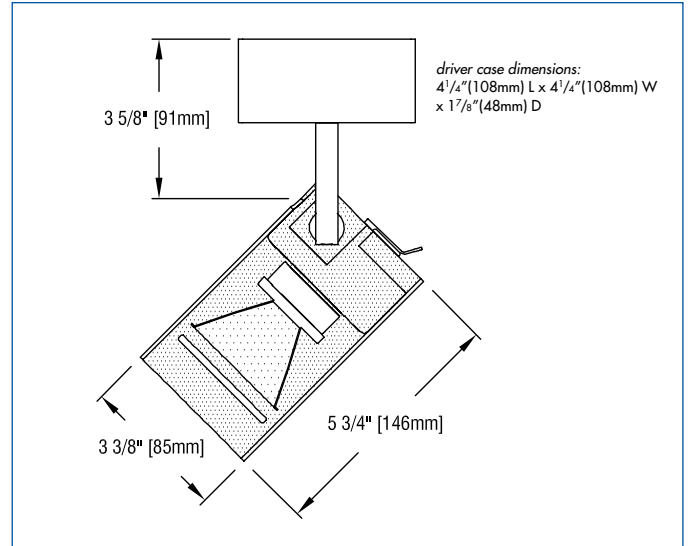

## APPLICATIONS

Luminaire is suitable for highlighting vertical or horizontal surfaces, as well as objects in museums, galleries, showrooms, residences, offices and stores.

Luminaire is suitable for 120-volt or 277-volt electrical service and listed for Damp Location mounting on a standard 4" octagonal outlet box (by others).

– see below for photometric reports –



## PHOTOMETRIC REPORT with 21° reflector (tested per IESNA LM-79-2008)


Prorated from Verification Services Report No. 1139429. Original test report furnished upon request.

Luminaire ..... surface-mounted LED accent light with a 21° reflector and black lens holder (NO LENS)

Lamp ..... Xicato XIM19 LED Module, 1300 lumens, 3000K

Lamp Life ..... rated 50.000 hours based on L70/B50 criteria. LM80 report by LED manufacturer furnished upon request

### CANDLEPOWER DISTRIBUTION

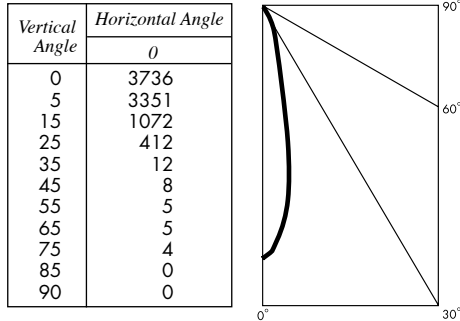

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire Efficacy (lms/watt)	System Wattage
1300 Lumens Artist	814	43*	19
1300 Lumens standard & Vibrant	814	54*	15

\*estimated values


## PHOTOMETRIC REPORT with 43° reflector (tested per IESNA LM-79-2008)

Prorated from Verification Services Report No. 1139430. Original test report furnished upon request.

Luminaire ..... surface-mounted LED accent light with a 43° reflector and black lens holder (NO LENS)

Lamp ..... Xicato XIM19 LED Module, 1300 lumens, 3000K Lamp Life ..... see above

### CANDLEPOWER DISTRIBUTION

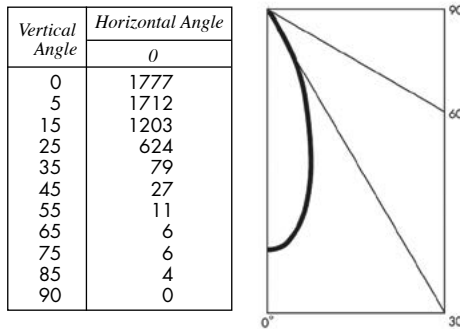

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire Efficacy (lms/watt)	System Wattage
1300 Lumens Artist	864	43*	19
1300 Lumens standard & Vibrant	864	58*	15

\*estimated values


## PHOTOMETRIC REPORT with 60° reflector (tested per IESNA LM-79-2008)

Prorated from Verification Services Report No. 1139431. Original test report furnished upon request.

Luminaire ..... surface-mounted LED accent light with a 60° reflector and black lens holder (NO LENS)

Lamp ..... Xicato XIM19 LED Module, 1300 lumens, 3000K Lamp Life ..... see above

### CANDLEPOWER DISTRIBUTION

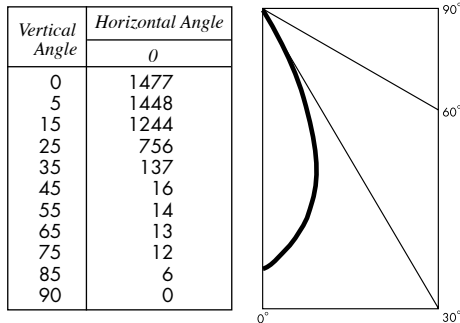

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire Efficacy (lms/watt)	System Wattage
1300 Lumens Artist	952	50*	19
1300 Lumens standard & Vibrant	952	63*	15

\*estimated values

## STANDARD DRIVER INFORMATION (UL Class 2, dry and damp location)

Voltage	120	277
Input Watts (1300A/13S&V)	19/15	19/15
Input Current(A) (1300A/13S&V)	.16/.13	.07/.05
Output Voltage (V)	48	48
Min. Power Factor	0.90	0.90
Operating Temperature Range (F)	-13 to 122	-13 to 122

## LIGHT OUTPUT MULTIPLIER

LED Module Type	Light Output Multiplier
1300 Lumens Artist	1
1300 Lumens standard & Vibrant	1