

Project

Type



MADE IN USA

[Click Here](#)

Date

Product Code

Designer

MINIMAX™ NSP-OBM BLUETOOTH

surface mounted addressable LED ring-baffled spotlight



Lens Collar not in use

Lens Collar in use

MiniMax NSP-OBM **Bluetooth** is a 10° or 24° spotlight designed for mounting on a 4" octagonal outlet box (by others). Luminaire is powered by one of a number of Xicato XIM Gen4 9mm LED modules – including 98 CRI Artist Series modules – all of which are distinguished by extraordinary color consistency (within 1x2-step MacAdam ellipse). See tables on the reverse for wattages and efficacies.

PRODUCT CODE

For complete product code, list basic unit and select one item from each following box.

Basic Unit	MM-XIS-OB-OG
Finish	
white:	- WH
black:	- BL
Industrial Silver:	- SI
custom color: <i>identify color in specification</i>	- CC

Beam Spread Reflector (<i>specify one to ship with fixture</i>)	
10° narrow spot.....	- 10D
24° spot.....	- 24D

Light Source Output	
700 lumens / CRI 98 Artist	- L07A
700 lumens / CRI 80+ standard	- L07S
700 lumens / CRI 80+ Vibrant.....	- L07V
1000 lumens / CRI 98 Artist	- L10A
1300 lumens / CRI 80+ standard	- L13S
1300 lumens / CRI 80+ Vibrant.....	- L13V

Light Color	
2700 K	- 27K
3000 K	- 30K
3500 K	- 35K
4000 K	- 40K

Circuit Limitations

Luminaire operates only on circuits with

- no dimmer on the circuit – or –
- a 0-10V dimmer on the circuit.

EXTRA REFLECTORS *Specify as separate line items.*

10° narrow spot reflector	XTS-REF10-70
24° spot reflector	XTS-REF24-70

USB Key

To address this fixture from a Windows-based PC, laptop or tablet, a USB key (dongle) is required. Contact factory for USB key.

OPTICAL ACCESSORIES ▼ *See next page*

- Luminaire is equipped with a Xicato XIM Gen4 LED module, an IOT device with embedded micro-processor and Bluetooth Low Energy chip, controllable via a smart device with iOS or Windows based apps. Features include
 - standard Bluetooth Wireless connectivity
 - addressable individually
 - on/off control
 - dimming to 0.1%. Combination with integral rotary dimmer available as modification.
 - data collection and storage for power consumption and LED performance
 - direct listening to switches and sensors
 - embedded Eddystone, iBeacon and/or AltBeacon beacons
- Quick Change Cartridge includes a matte black concentric ring baffle which increases beam control, eliminates spill light and minimizes glare.
- Beam spread is changed by removing the Quick Change Cartridge, replacing one 'twist and lock' reflector with another, and replacing the cartridge. Luminaire is ordered with a single reflector; one or both of the other reflectors may be ordered as accessories.
- A Lens Collar is included with each fixture. Collar may be loaded with one or two Optical Accessories – including spread lenses, color filters or screens – and then snapped into mouth of fixture. A complimentary Beam Smoother is included.
- A concealed swivel provides 385° horizontal rotation and vertical adjustment from 0° to 90°. The swivel is permanently tensioned, allowing the luminaire to remain fixed at any angle. Luminaire can be locked in place by depressing a hinged ('lever lock') bar so that it lies flush with the top of the housing. Lifting the lever lock frees the swivel.
- MiniMax luminaires have seamless aluminum housings and cast aluminum tops for lightweight durability and heat dissipation.
- For more information, [click here](#).



41-50 22ND STREET, LIC NY 11101 TEL 718.685.0700 FAX 718.786.8530 www.epl.com

©Copyright, Edison Price Lighting 2019

MiniMax is a pending trademark of Edison Price Lighting.

LED 0-208 6:19


OPTICAL ACCESSORIES

Suitable for use only with 'OG' model luminaire with lens clips.

Specify as separate line items.

All are 2 3/4" (70mm) dia. Lenses and filters are glass; screens are aluminum.

diffuse glass	DGS/2.75
prismatic lens (Solite)	PLS/2.75
55° spread lens	LENS/2.75
40° x 70° spread lens	LENS/2.75-4070
beam smoother	CLR/2.75
color filters	
Daylight Blue	DAY/2.75
Surprise Pink	PNK/2.75
amber	AMB/2.75
blue	BLU/2.75
green	GRN/2.75
red	RED/2.75
33% light reduction screen	SCR33/2.75
50% light reduction screen	SCR50/2.75

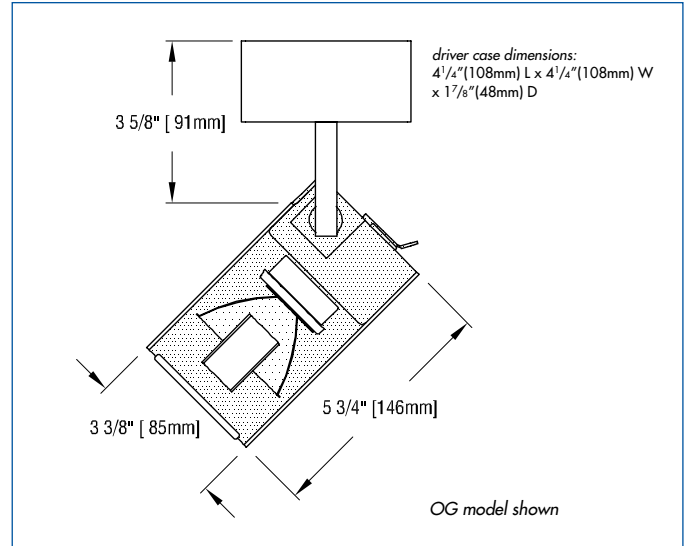

APPLICATIONS

Luminaire is suitable for 120-volt or 277-volt electrical service and listed for Damp Location mounting on a standard 4" octagonal outlet box (by others).

– see below for photometric reports –



PHOTOMETRIC REPORT with 10° reflector (tested per IESNA LM-79-2008)


Prorated from Verification Services Report No. 1197591. Original test report furnished upon request.

Luminaire surface-mounted LED accent light with a 10° reflector and black ring-baffle (NO LENS)

Lamp Xicato XIM 9mm LED Module, 1300 lumens, 3000K

Lamp Life rated 50,000 hours based on L70/B50 criteria. LM80 report by LED manufacturer furnished upon request

CANDLEPOWER DISTRIBUTION (Candela)

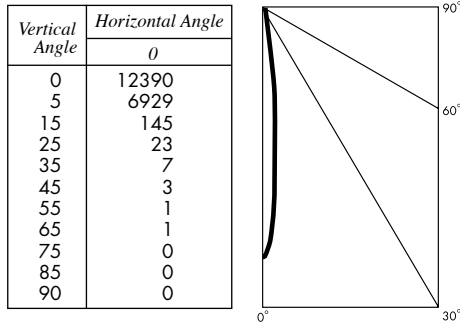

LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire CBCP	Luminaire Efficacy (lms/watt)	System Wattage
700 Lumens Artist	307*	6815*	22*	14
700 Lumens standard & Vibrant	307*	6815*	27*	11
1000 Lumens Artist	430*	9528*	19*	23
1300 Lumens standard & Vibrant	559	12,390	29	19

*estimated values

PHOTOMETRIC REPORT with 24° reflector (tested per IESNA LM-79-2008)


Prorated from Verification Services Report No. 1197593. Original test report furnished upon request.

Luminaire surface-mounted LED accent light with a 24° reflector and black ring-baffle (NO LENS)

Lamp Xicato XIM 9mm LED Module, 1300 lumens, 3000K

Lamp Life rated 50,000 hours based on L70/B50 criteria. LM80 report by LED manufacturer furnished upon request

CANDLEPOWER DISTRIBUTION (Candela)

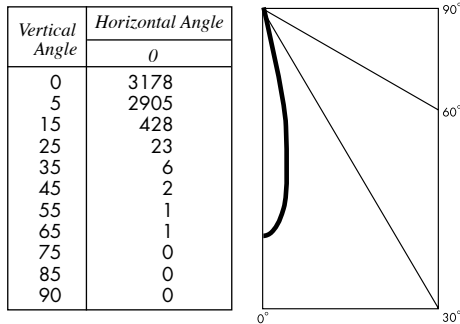

LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire CBCP	Luminaire Efficacy (lms/watt)	System Wattage
700 Lumens Artist	224*	1747*	16*	14
700 Lumens standard & Vibrant	224*	1747*	20*	11
1000 Lumens Artist	314*	2444*	14*	23
1300 Lumens standard & Vibrant	408	3178	21	19

*estimated values

STANDARD DRIVER INFORMATION (UL Class 2, dry and damp location)

Voltage	120	277
Input Watts (L07A/L10A/L7S&V/13S&V)	14/23/11/19	14/23/11/19
Input Current(A) (L07A/L10A/L7S&V/13S&V)	.12/.19/.09/.16	.05/.08/.04/.07
Output Voltage (V)	48	48
Min. Power Factor	0.90	0.90
Operating Temperature Range (F)	-13 to 122	-13 to 122

LIGHT OUTPUT MULTIPLIER

LED Module Type	Light Output Multiplier
700 Lumens Artist	.55*
700 Lumens standard & Vibrant	.55*
1000 Lumens Artist	.77*
1300 Lumens standard & Vibrant	1

*estimated values