

Project

Type



Date

Product Code

Designer

MIDIMAX™ LED O-OBM

surface mounted LED cross-baffled accent light



MidiMax LED O-OBM is a surface mounted accent light powered by one of a number of Xicato LED modules, all of which are distinguished by extraordinary color consistency (within 1x2-step MacAdam ellipse). See tables below for wattages and efficacies.

- **Luminaire is designed for mounting on a 4" octagonal outlet box** (by others).
- **Luminaire may be ordered with one of a number of drivers.**
- **A matte black cross-baffle assembly controls surface brightness and reduces spill light.** Lens orientation may be adjusted from below by rotating cross-baffles. The cross-baffle assembly is spring mounted but keyed relative to the fixture housing, to retain lens orientation once set.
- **Beam spread is changed by removing the cross-baffle assembly,** replacing one 'twist and lock' [reflector](#) with another, and re-inserting the cross-baffle assembly. Luminaire is ordered with a single reflector; one or both of the other reflectors may be ordered as accessories.
- **A concealed swivel provides 385° horizontal rotation and vertical adjustment from 0° to 90°.** The swivel is permanently tensioned, allowing the luminaire to remain fixed at any aiming angle.
- **MidiMax LED O-OBM accepts one or two of a number of [Optical Accessories](#),** including spread lenses, a beam smoother, color filters and light reduction screens. A complimentary Beam Smoother is included.
- **MidiMax luminaires have seamless aluminum housings and cast aluminum tops for lightweight durability and heat dissipation.** Standard finish is matte white; also available in black and Industrial Silver matte paint finishes.
- **For more information, [click here](#).**

MODIFICATIONS AVAILABLE

Contact factory with quantity for pricing; orders may require shop drawing approval.
For modified stem lengths up to 72", add the following to the end of the product code:
+ number of inches.

PRODUCT CODE

For complete product code, list basic unit and select one item from each following box.

Basic Unit LX-XTM-OB-OX

Beam Spread Reflector (specify one to ship with fixture)

20° spot - 20D
40° flood - 40D
60° wide flood - 60D

For **narrow spot**, see MidiMax LED NSP-OBM

Finish

white finish: - WH
black finish: - BL
Industrial Silver finish: - SI
custom color paint finish...include paint number or physical chip with order - CC

Driver

dimmable to 10% (see Light Output box below) with electronic low voltage (ELV) dimmer on 120-volt service only - DME

dimmable to 5% (see Light Output box below) with either incandescent or electronic low voltage (ELV) dimmer on 120-volt service only - DMP

dimmable to 10% (see Light Output box below) with a 0-10V dimmer on 120-volt or 277-volt service - DMV

dimmable by **integral dimming module** see, MidiMax LED O IDM-OBM
dimmable **wirelessly** see, MidiMax O-OBM Bluetooth

Light Source Output (Lumens)

1000L/CRI 98 ArtistDMP (5%) or DMV (10%)....- L10A
1400L/CRI 98 ArtistDMP (5%) or DMV (10%)....- L14A
1500L/CRI 80+DMP (5%) or DMV (10%)....- L15S
1500L/CRI 80+ Vibrant ...3000K only....DMP (5%) or DMV (10%)....- L15V
2100L/CRI 80+DMP (5%) or DMV (10%)....- L21S
2100L/CRI 80+ Vibrant...3000K only....DMP (5%) or DMV (10%)....- L21V
2140L/CRI 98 Artist.....DME (10%) or DMV (10%)..- L21A

Light Color

2700 K..... - 27K
3000 K..... - 30K
3500 K..... - 35K
4000 K..... - 40K

OPTIONS *Specify by adding to the product code.*

a rocker type **on/off switch** on fixture top, for use on 120-volt service only - SW
white switch for white fixture, black for Silver or black fixture, specify which for custom color fixture

EXTRA REFLECTORS *Specify as separate line items.*

20° spot reflectorXTM-REF20-72
40° flood reflector.....XTM-REF40-72
60° wide flood reflectorXTM-REF60-70

OPTICAL ACCESSORIES ▼ *See next page*




OPTICAL ACCESSORIES

Specify as separate line items.

All are 3 3/4" (95mm) dia. Lenses and filters are glass; screens are aluminum.

55° spread lens	LENS/3.75
40° x 70° spread lens	LENS/3.75-4070
prismatic lens (Solite)	PLS/3.75
beam smoother included with fixture	CLR/3.75
color filters	
Daylight Blue	DAY/3.75
Surprise Pink	PNK/3.75
amber	AMB/3.75
blue	BLU/3.75
green	GRN/3.75
red	RED/3.75
33% light reduction screen	SCR33/3.75
50% light reduction screen	SCR50/3.75

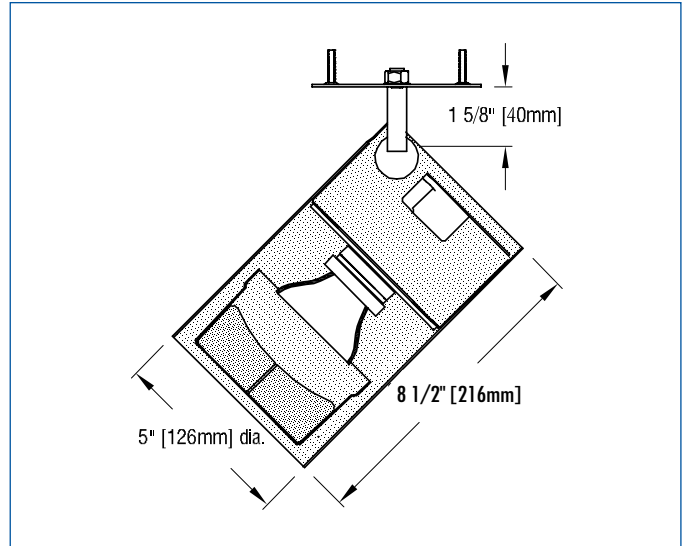

APPLICATIONS

Luminaire is suitable for highlighting vertical or horizontal surfaces, as well as objects in museums, galleries, showrooms, residences, offices and stores.

Luminaire is listed for Damp Location mounting on a standard 4" octagonal outlet box (by others).

– see below for photometric reports –




PHOTOMETRIC REPORT with 20° reflector (tested per IESNA LM-79-2008)

UL Verification Services Report No. 1164149. Original test report furnished upon request.

Luminaire surface-mounted LED accent light with a 20° reflector and black cross-baffle (NO LENS)
 Lamp Xicato XTM LED Module, 2100 lumens, 3000K
 Lamp Life rated 50.000 hours based on L70/B50 criteria. LM80 report by LED manufacturer furnished upon request

CANDLEPOWER DISTRIBUTION

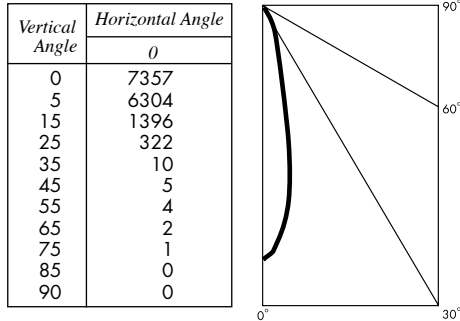

LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire Efficacy (lms/watt)	System Wattage
1000 Lumens Artist	502*	37*	14
1400 Lumens Artist	722*	34*	21
2100 Lumens Artist	1072*	41*	26
1500 Lumens standard & Vibrant	801*	45*	18
2100 Lumens standard & Vibrant	1072	47	23


*estimated values

PHOTOMETRIC REPORT with 40° reflector (tested per IESNA LM-79-2008)

UL Verification Services Report No. 1164150. Original test report furnished upon request.

Luminaire surface-mounted LED accent light with a 40° reflector and black cross-baffle (NO LENS)
 Lamp Xicato XTM LED Module, 2100 lumens, 3000K Lamp Life see above

CANDLEPOWER DISTRIBUTION

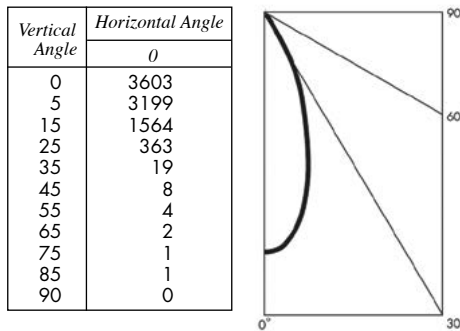

LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire Efficacy (lms/watt)	System Wattage
1000 Lumens Artist	428*	31*	14
1400 Lumens Artist	615*	29*	21
2100 Lumens Artist	914*	35*	26
1500 Lumens standard & Vibrant	683*	38*	18
2100 Lumens standard & Vibrant	914	40	23


*estimated values

PHOTOMETRIC REPORT with 60° reflector (tested per IESNA LM-79-2008)

UL Verification Services Report No. 1164151. Original test report furnished upon request.

Luminaire surface-mounted LED accent light with a 60° reflector and black cross-baffle (NO LENS)
 Lamp Xicato XTM LED Module, 2100 lumens, 3000K Lamp Life see above

CANDLEPOWER DISTRIBUTION

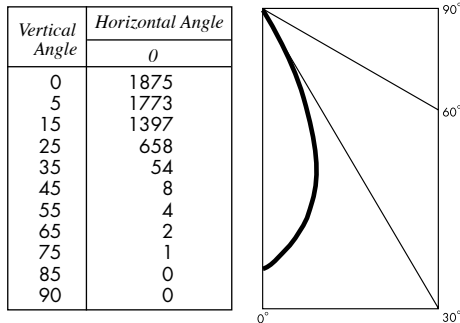

LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire Efficacy (lms/watt)	System Wattage
1000 Lumens Artist	427*	31*	14
1400 Lumens Artist	614*	29*	21
2100 Lumens Artist	912*	35*	26
1500 Lumens standard & Vibrant	682*	38*	18
2100 Lumens standard & Vibrant	912	40	23

*estimated values

STANDARD DRIVER INFORMATION (UL Class 2, dry and damp location)

Voltage	120	277
Input Watts (1000A/1400A/2100A/1500/2100 lumens)	14/21/26/18/23	14/21/26/18/23
Input Current(A) (1000A/1400A/2100A/1500/2100 lumens)	.12/18/22/15/19	.05/08/09/06/08
Output Current (mA)	500-1050	500-1050
Min. Power Factor	0.90	0.90
Operating Temperature Range (F)	-13 to 122	-13 to 122

LIGHT OUTPUT MULTIPLIER

LED Module Type	Light Output Multiplier
1000 Lumens Artist	.47*
1400 Lumens Artist	.67*
2100 Lumens Artist	1
1500 Lumens standard & Vibrant	.75*
2100 Lumens standard & Vibrant	1