

# ARTIMA® SRA AR111-OBMX

surface mounted accent light 

## FEATURES

**Artima SRA AR111-OBMX is an accent light** designed for use with the following 12-volt, G53 base, SORAA AR111 lamps (supplied by others):

- 12.5 watt Vivid (CRI 95): 8°, 25° & 36° beams
- 18.5 watt Vivid (CRI 95): 9°, 25° & 36° beams

**Fixture is designed for mounting on a 4" octagonal mounting box** (by others) and includes an integral 120/12-volt electronic transformer mounted on top of the outlet box cover.


**The two lamp leads are terminated for quick connection to the lamp contacts** and are concealed under a cylindrical cap.

**The optical assembly consists of a matte black cross-baffle** which reduces spill light and controls lamp brightness. Axial rotation of the cross-baffle allows optional lenses to be oriented easily. Once set, the optical assembly is entirely undisturbed by relamping.

**Fixture provides 385° horizontal rotation and vertical adjustment from 0° to 90°.** Lamp focus can be locked by tightening two collar clamps using a 3/64" hex key.

**Fixture accepts one or two of a number of [Optical Accessories](#)**, including spread lenses, color filters and light reduction screens.

**Standard finish is matte white with a white socket lead;** also available in black and Industrial Silver matte paint finishes.

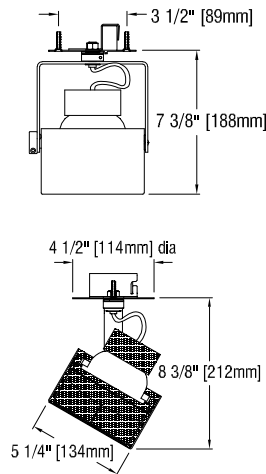

## APPLICATIONS



Fixture is suitable for directional accent and display highlighting in museums, galleries, showrooms, residences, offices and stores.

Fixture is suitable for 120-volt electrical service and cULus listed for mounting on a standard 4" octagonal outlet box (by others).

### Lamp (By Others) Dimming Info

Edison Price Lighting does not include lamps and does not sell Soraa lamps or accessories. For the dimming compatibility of standard fixtures consult Soraa's "Transformer & Dimming Compatibility" table at [www.soraa.com](http://www.soraa.com). Check the line for Hatch RS12-60M/LED transformers.

## PRODUCT CODE

Complete Product Code.....ART SRA AR111-OBMX  
standard finish: matte white with white socket lead

## OPTIONS

Specify by adding to the product code.

**matte black** housing finish, includes black socket lead ..... – BLK

**Industrial Silver** housing finish, includes black socket lead ..... – SIL

**custom color** paint housing finish

specify white or black socket lead ..... – WSLV or – BSLV  
and identify color in specification ..... CCH

## OPTICAL ACCESSORIES

Specify as separate line items; only for use with one of the above.

All are 4 3/4" (121mm) diameter. Lenses and filters are glass; screens are aluminum.

**30° spread lens** ..... LENS/4.75-30

**30° Daylight Blue spread lens** ..... DAY LENS/4.75-30

**20° x 55° spread lens** ..... LENS/4.75

**55° Daylight Blue spread lens** ..... DAY LENS/4.75

**70° spread lens** ..... LENS/4.75-70

**prismatic lens (Solite)** ..... PLS/4.75

**40° x 70° spread lens** ..... LENS/4.75-4070

**beam smoother** ..... CLR/4.75

### color filters

Daylight Blue ..... DAY/4.75

Surprise Pink ..... PNK/4.75

amber ..... AMB/4.75

blue ..... BLU/4.75

green ..... GRN/4.75

red ..... RED/4.75

**33% light reduction screen** ..... SCR33/4.75

**50% light reduction screen** ..... SCR50/4.75



# ARTIMA SRA AR111-OBMX

---



For current Soraa AR111 lamp performance data, consult [www.soraa.com](http://www.soraa.com).