

Project

Type



Date

Product Code

Designer

DARKLITE® 38E/6 SLOPE

recessed PAR 38 LED sloped ceiling downlight


MADE-TO-ORDER • MAY NOT BE RETURNED FOR CREDIT • MADE-TO-ORDER • MAY NOT BE RETURNED FOR CREDIT



Darklite 38E/6 Slope is a 6" aperture sloped ceiling downlight which has been checked for fit and initial operation with a PAR 38 LED retrofit lamp (supplied by others) including:

- Ketra S38
- Soraa PAR38
- GE PAR 38
- TCP Allusion PAR 38, dim-to-warm
- Additional lamps may be suitable. Contact factory with inquiries.

- Fixture is made in eight different configurations conforming to ceiling slopes of 5°, 10°, 15°, 20°, 25°, 30°, 35° and 40°. Fixture may be relamped from below without removing reflector.
- Darklite 38E/6 Slope provides a shielding angle of 40° from upslope points of view and greater than 40° from downslope. Recess depth varies with slope but is never greater than 11 5/8" (see table).
- Reflector consists of a single, seamless aluminum spinning from lamp to ceiling line, resulting in a uniquely elegant appearance. (No added 'slope adaptors'; no joints; no obtrusive mismatches of color, contour or finish.)
- Reflector is available in three clear natural aluminum finishes — semi-specular (C), slightly diffuse (V) or fully diffuse (EC) — as well as champagne gold or black Alzak. Other reflector finishes are available on special order.
- The elliptical edge of the reflector is trimmed with a 1 1/8" wide steel flange to conceal the edges of the ceiling installation hole. Standard flange finish is white; custom paint finish available on special order.
- Darklite 38E/6 Slope includes a pair of mounting bars (3/4" x 27" C channel). Specialty bars for wood joist and T-bar installations are also available.
- Housing is constructed from 16-gauge and 20-gauge electro-zinc plated steel in Edison Price Lighting's American factory.
- For more information, [click here](#).



FIXTURE DIMENSIONS

	5° Slope	10° Slope	15° Slope	20° Slope
Fixture Depth	11 1/8"	11 3/8"	11 5/8"	11 5/8"
Fixture Footprint	11 3/8" x 14"	11 3/8" x 14"	11 3/8" x 15"	11 3/8" x 15"

	25° Slope	30° Slope	35° Slope	40° Slope
Fixture Depth	11 5/8"	11 5/8"	11 1/2"	11 1/4"
Fixture Footprint	11 3/8" x 16"	11 3/8" x 16"	11 3/8" x 17"	11 3/8" x 18"

PRODUCT CODE

For a complete product code, list basic unit and select one code item from each following box.

Basic Unit	DL 38/6 SLOPE
------------------	---------------

Slope	
5°	-05
15°	-15
25°	-25
35°	-35
10°	-10
20°	-20
30°	-30
40°	-40

Reflector Color/Trim Flange Color	
Semi-specular Clear	-C
Slightly diffuse Clear	-V
Fully diffuse Clear	-E
Champagne Gold	-G
Black	-B

Other reflector finishes are available on special order.
 Standard trim flange finish is white.
 Custom painted flanges are available on special order; add CCF (custom color flange).

LAMPS BY OTHERS

Edison Price Lighting does not include lamps and does not sell either lamps or their accessories.

DIMMING

For dimming compatibility consult the lamp manufacturer's website.

WIRELESS LIMITATIONS

The wireless range of lamped fixtures will vary with lamp and site conditions.


- Standard recessed, see [DARKLITE 38E/6](#)




DARKLITE 38E/6 SLOPE

MADE-TO-ORDER • MAY NOT BE RETURNED FOR CREDIT • MADE-TO-ORDER • MAY NOT BE RETURNED FOR CREDIT

APPLICATIONS

Fixture is  listed for **Damp Location**. Fixture is prewired with thermal protector, suitable for use in a fire rated ceiling, and approved for ten #12 wire 75°C branch circuit pull-through wiring. Removal of the housing from below allows access to the junction box.

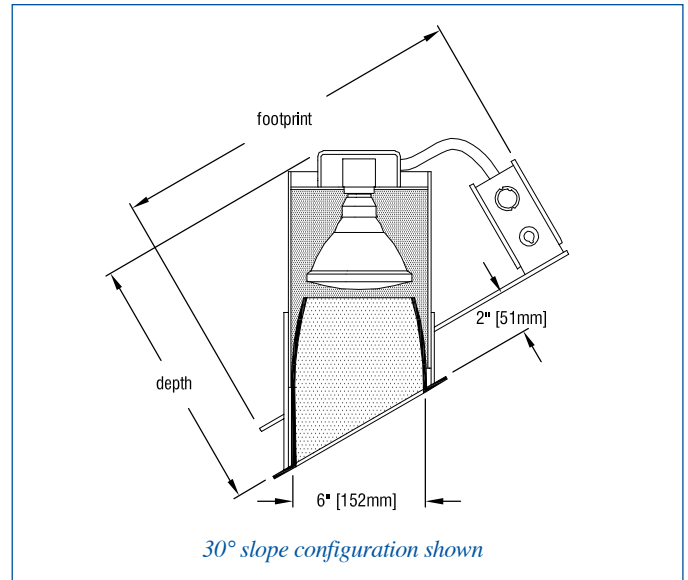

For current lamp performance data, consult lamp manufacturer's website.