

Project

Type



MADE IN USA
Click Here

Date

Product Code

Designer



DARKLITE® 38E/7 SLOPE

recessed PAR 38 LED sloped ceiling downlight

MADE-TO-ORDER • MAY NOT BE RETURNED FOR CREDIT • MADE-TO-ORDER • MAY NOT BE RETURNED FOR CREDIT

FEATURES

- **Darklite 38E/7 Slope is a 7" aperture sloped ceiling downlight** which has been checked for fit and initial operation with a PAR 38 LED retrofit lamp (supplied by others):including:
 - Ketra S38
 - Soraa PAR38
 - GE PAR 38
 - TCP Allusion PAR 38, dim-to-warm
 - Additional lamps may be suitable. Contact factory with inquiries.
- **Fixture is made in eight different configurations conforming to ceiling slopes of 5°, 10°, 15°, 20°, 25°, 30°, 35° and 40°.**
- **Darklite 38E/7 Slope provides a shielding angle of 40° from upslope points of view and greater than 40° from downslope.** Recess depth varies with slope but is never greater than 12 1/4" (see table).
- **Reflector consists of a single, seamless aluminum spinning from lamp to ceiling line,** resulting in a uniquely elegant appearance. (No added 'slope adaptors'; no joints; no obtrusive mismatches of color, contour or finish.)
- **Reflector is available in three clear natural aluminum finishes** — semi-specular (C), slightly diffuse (V) or fully diffuse (EC) — as well as champagne gold or black Alzak . Other reflector finishes are available on special order.
- **The elliptical edge of the reflector is trimmed with a 1 1/8" wide steel flange to conceal the edges of the ceiling installation hole.** Standard flange finish is white; custom paint finish available on special order.
- **Housing is constructed from 16-gauge electro-zinc plated steel and 20-gauge electro-zinc, polyester-coated steel** in Edison Price Lighting's American factory. Heavy-gauge metals, an additional protective coating, and American manufacturing guarantees long-lasting durability.
- **Darklite 38E/7 Slope includes a pair of mounting bars (3/4" x 27" C channel).** Specialty bars for wood joist and T-bar installations are also available.
- **For more information, [click here.](#)**

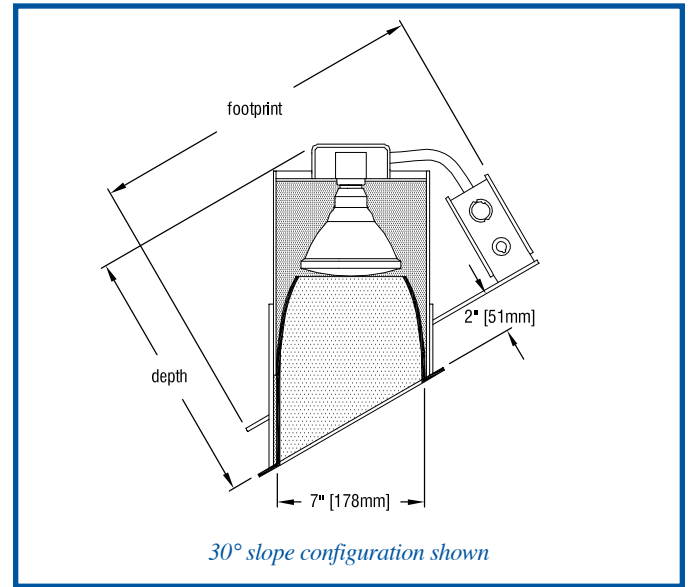

FIXTURE DIMENSIONS

	5° Slope	10° Slope	15° Slope	20° Slope
Fixture Depth	11 1/2"	11 7/8"	12"	12 1/4"
Fixture Footprint	11 3/8" x 14"	11 3/8" x 14"	11 3/8" x 15"	11 3/8" x 15"

	25° Slope	30° Slope	35° Slope	40° Slope
Fixture Depth	12 1/4"	12 1/4"	12 1/8"	12"
Fixture Footprint	11 3/8" x 16"	11 3/8" x 16"	11 3/8" x 17"	11 3/8" x 18"

PRODUCT CODE

For a complete product code, list basic unit and select one code item from each following box.

Basic Unit DL 38/7 SLOPE

Slope	
5°	-05
15°	-15
25°	-25
35°	-35
10°	-10
20°	-20
30°	-30
40°	-40

Reflector Color/Trim Flange Color	
Semi-specular Clear.....	-C
Slightly diffuse Clear.....	-V
Fully diffuse Clear.....	-E
Champagne Gold	-G
Black	-B

Other reflector finishes are available on special order.
Standard trim flange finish is white.
Custom painted flanges are available on special order; add CCF (custom color flange).

APPLICATIONS



Fixture is listed for Damp Location. Fixture is prewired with thermal protector, suitable for use in a fire rated ceiling, and approved for ten #12 wire 75°C branch circuit pull-through wiring. Removal of the housing from below allows access to the junction box.

LAMPS BY OTHERS

Edison Price Lighting does not include lamps and does not sell either lamps or their accessories.

DIMMING

For dimming compatibility consult the lamp manufacturer's website.

WIRELESS LIMITATIONS

The wireless range of lamped fixtures will vary with lamp and site conditions.

- **Standard recessed,** see [DARKLITE 38E/7](#)



DARKLITE 38E/7 SLOPE



MADE-TO-ORDER • MAY NOT BE RETURNED FOR CREDIT • MADE-TO-ORDER • MAY NOT BE RETURNED FOR CREDIT

For current lamp performance data, consult lamp manufacturer's website.