

Project

Date

Product Code

Type

Designer



MADE IN USA

[Click Here](#)

# MINIMAX™ 16E O

track mounted MR16 LED accent light



- Fixture may be powered by one of eighteen 20-amp 120-volt track systems.
- The optical assembly consists of a black cross-baffle which reduces spill light and controls lamp brightness. This assembly is fixed in place for precise aiming and easily removed as a unit for relamping.
- A concealed swivel provides 385° horizontal rotation and vertical adjustment from 0° to 90°. The swivel is permanently tensioned, allowing the fixture to remain fixed at any aiming angle. Fixture can be fully locked in place, in both vertical and horizontal planes, simply by depressing a hinged ("lever lock") bar so that it lies flush with the top of the fixture. Locked in this way, fixture will maintain focus even when manipulated for re-lamping. Lifting the lever lock frees the swivel and allows re-aiming.
- With a 7.5 watt lamp only, fixture accepts one or two of a number of Edison Price Lighting [Optical Accessories](#), including spread lenses, a beam smoother, color filters and light reduction screens. **Alternatively, and again with a 7.5 watt lamp only**, fixture accepts Soraa Snap System optical accessories, supplied by others.
- MiniMax fixtures have seamless aluminum housings for lightweight durability and cast aluminum tops for heat dissipation. Standard finish is matte white; also available in black and Industrial Silver matte paint finishes.
- For more information, [click here](#).

For the outlet box mounted version of this fixture, see [MiniMax 16E O-OBM](#).

### MODIFICATIONS AVAILABLE

Contact factory with quantity for pricing; orders may require shop drawing approval.  
For modified stem lengths up to 72", add the following to the end of the product code:  
+ number of inches.

MiniMax 16E O is an accent light designed for use with a 120-volt, GU10 base, 7.5 watt and 9 watt Soraa MR16-GU10 lamp, supplied by others. Additional lamps may be suitable. Contact factory with inquiries.

### PRODUCT CODE

Basic Unit .....MM-16E-OX-2C

### OPTIONS

Specify by adding to the product code.

matte black housing finish ..... – BLK  
 Industrial Silver housing finish ..... – SIL  
 custom color paint housing finish  
 identify color in specification ..... CCH

### OPTICAL ACCESSORIES

Specify as separate line items.

All are 2 3/8" (60mm) dia. Lenses and filters are glass; screens are aluminum.

diffuse glass .....DGS/2.75  
 prismatic lens .....PLS/2.75  
 55° spread lens .....LENS/2.75  
 40° x 70° spread lens .....LENS/2.75-4070  
 beam smoother .....CLR/2.75  
 color filters  
 Daylight Blue .....DAY/2.75  
 Surprise Pink .....PNK/2.75  
 blue .....BLU/2.75  
 green .....GRN/2.75  
 red .....RED/2.75  
 33% light reduction screen .....SCR33/2.75  
 50% light reduction screen .....SCR50/2.75

### Lamp (By Others) Dimming Info

Edison Price Lighting does not include lamps and does not sell either lamps or their accessories. For dimming compatibility consult the lamp manufacturer's website.



41-50 22<sup>ND</sup> STREET, LIC NY 11101 TEL 718.685.0700 FAX 718.786.8530 [www.epl.com](http://www.epl.com)

©Copyright, Edison Price Lighting 2019

MiniMax is a pending trademark of Edison Price Lighting.

TF 11-111 10:19

# MINIMAX 16E O


---

## APPLICATIONS

---

Fixture is suitable for highlighting vertical or horizontal surfaces, as well as objects in museums, galleries, showrooms, residences, offices and stores.

Fixture is  listed for mounting on Edison Price Lighting 120-volt track only.

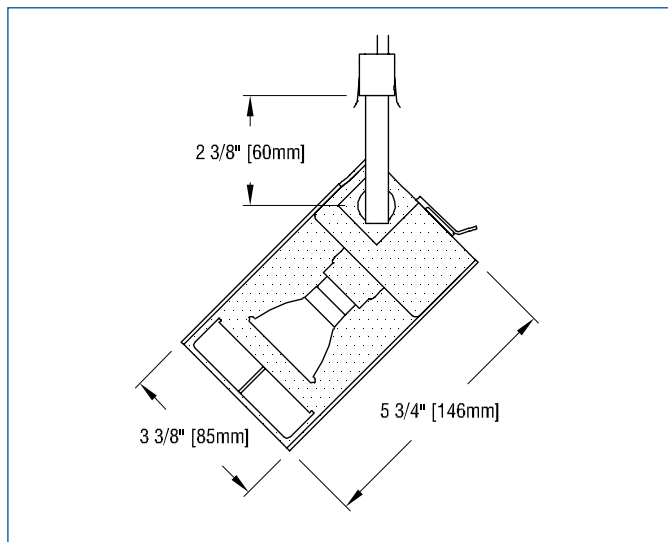

---

For current Sora MR16-GU10 lamp performance data, consult [www.soraa.com](http://www.soraa.com).