

ARTIMA® 38 O-OBM

surface mounted accent light

PAR LAMP
4-522

FEATURES

Artima 38 O-OBM is an accent light designed for use with PAR-38 flood or spot lamps (250-watt maximum). Fixture is designed for mounting on a 4" octagonal outlet box (by others).


The optical assembly for Artima 38 O-OBM is a matte black cross-baffle which reduces spill light and controls lamp brightness. This assembly and its setting, are entirely undisturbed by relamping.

A flared socket cap and light shield ring prevent any backsplash of light onto the ceiling.

Artima 38 O-OBM fixtures provide 385° horizontal rotation and vertical adjustment from 0° to 90°. Lamp focus can be locked by tightening two collar clamps using a 1/64" hex key.

Artima 38 O-OBM fixtures accept one or two of a number of Optical Accessories including spread lenses, a beam smoother, a UV filter, color filters and light reduction screens. We especially recommend the addition of one of our spread lenses when using the Artima 38 O-OBM for critical display functions.

Standard finish is matte white with a white socket lead; also available in black and Industrial Silver matte paint finishes.

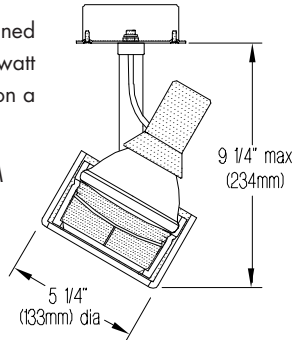

APPLICATIONS



Fixture is suitable for highlighting vertical or horizontal surfaces, as well as objects in museums, galleries, showrooms, residences, offices and stores.

Fixture is suitable for 120-volt electrical service and cUL^{US} listed for mounting on a standard 4" octagonal outlet box (by others).

PRODUCT CODE

Complete Product Code.....ART 38 O-OBM
standard finish: matte white with white socket lead

OPTIONS

Specify by adding to the product code.

matte black housing finish

black socket lead standard - BLK

Industrial Silver housing finish

black socket lead standard - SIL

custom color paint housing finish

specify white or black socket lead - WSLV or - BSLV
and identify color in specification CCH

OPTICAL ACCESSORIES

Specify as separate line items.

All are 4 3/4" (121mm) dia. Lenses and filters are glass; screens are aluminum.

30° spread lens LENS/4.75-30

30° Daylight Blue spread lens DAY LENS/4.75-30

20° x 55° spread lens LENS/4.75

55° Daylight Blue spread lens DAY LENS/4.75

70° spread lens LENS/4.75-70

prismatic lens (Solite) PLS/4.75

40° x 70° spread lens LENS/4.75-4070

beam smoother CLR/4.75

UV filter UVF/4.75

color filters

Daylight Blue DAY/4.75

Surprise Pink PNK/4.75

amber AMB/4.75

blue BLU/4.75

green GRN/4.75

red RED/4.75

33% light reduction screen SCR33/4.75

50% light reduction screen SCR50/4.75



PHOTOMETRIC REPORT – SPOT

Report No. 46848. Original Independent Testing Laboratories, Inc. (ITL) test report furnished upon request.

Luminaire surface mounted adjustable accent light with 55° spread lens; aimed at 30° above vertical

Lamp 100-watt PAR-38 HIR SP, 2070 lumens

Efficiency 53.7%

PHOTOMETRIC REPORT – FLOOD


Report No. 46849. Original Independent Testing Laboratories, Inc. (ITL) test report furnished upon request.

Luminaire surface mounted adjustable accent light with 55° spread lens; aimed at 30° above vertical

Lamp 100-watt PAR-30 HIR FL, 2070 lumens

Efficiency 47.6%

CANDLEPOWER DISTRIBUTION

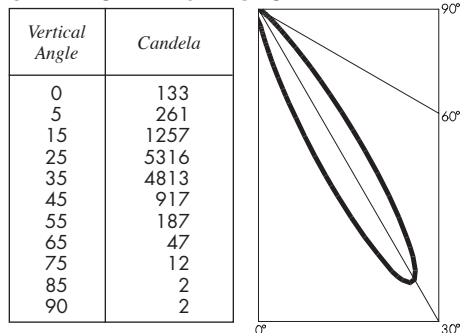

CANDLEPOWER DISTRIBUTION

