

Project

Date

Product Code

Type

Designer



MADE IN USA

[Click Here](#)

EPIC LED FTF DL/5

recessed IC LED downlight

COMPETITIVELY PRICED – EPL QUALITY – COMPETITIVELY PRICED – EPL QUALITY – COMPETITIVELY PRICED – EPL QUALITY – COMPETITIVELY PRICED

FEATURES

- **EPIC LED FTF DL/5 is a 5" aperture LED downlight** designed for insulation contact (IC) and certified airtight under ASTM E283.
- **Precise reflector design yields an optical efficiency of 90%**, minimizes aperture brightness and provides a shielding angle of 40°.
- **Luminaire is powered by one of a number of Philips Fortimo DLM remote phosphor LED modules with a CRI of 90.** Luminaire may be specified with 2700K, 3000K or 3500K color. Refer to the performance tables below for system wattages and luminaire efficacies.
- **Housing is constructed from 20-gauge electro-zinc, polyester-coated steel** in Edison Price Lighting's American factory. Heavy-gauge metals, an additional protective coating, and American manufacturing guarantees long-lasting durability.
- **Reflector is available in two clear natural aluminum finishes** – semi-specular Alzak (C) or slightly diffuse (V) – as well as champagne gold and black. Other reflector finishes are available on special order.
- **EPIC LED FTF DL/5 includes a pair of residential mounting bars** extendable to 20" and designed for use in wood joists.
- **For more information, [click here](#).**

APPLICATIONS

Luminaire is recommended for downlighting in commercial, retail and residential spaces where insulation is specified or likely to be retrofit into the ceiling plenum.

Luminaire is  listed for direct contact with insulation, certified airtight under ASTM E283, and suitable for damp location. Luminaire is prewired, suitable for use in a fire rated ceiling, and approved for eight #12 wire 75° C branch circuit pull-through wiring. Luminaire is RoHS compliant. Removal of the reflector allows access to the driver and junction box.




MODIFICATIONS AVAILABLE

Contact factory with quantity for pricing; orders may require shop drawing approval.

- **+2" CLG:** fixture suitable for installation in **2" thick ceiling**; add +2" CLG to Product Code.
- **+DOD:** luminaire suitable for **high humidity** environments; add +DOD to Product Code.
- **+FL:** reflector flush trim detail for metal or wood ceilings; add +FL to Product Code.
- **+MAR:** reflector suitable for **marine** environments; add +MAR to Product Code.

Standard recessed, see [LED FTF DL/5](#)

Install-from-below, see [PRESTO LED FTF DL/5](#)

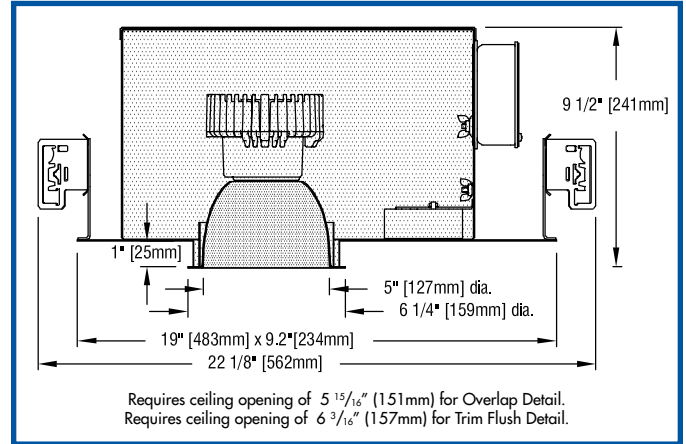

PRODUCT CODE

For complete product code, list basic unit and select one item from each following box.

Basic Unit EPIC-FTF-5DL

Light Source Output

- 1100 lumens L11
- 1500 lumens L15
- 2000 lumens L20

Driver

- dimmable to 1% by a 0-10V dimmer on 120 or 277-volt service DMV-AD
- dimmable to 1% SoftOn/FadeToBlack by a Lutron EcoSystem control, on 120-volt or 277-volt service ECO-LU
- dimmable to 1% by a 2-wire Lutron compatible dimmer, on a 120-volt service only DMI-LU
- eldoLED 0-10V (Logarithmic) driver dimmable to 0.1% with a 0-10V dimmer on 120 or 277-volt service DVOELG
- eldoLED 0-10V (Linear) driver dimmable to 0.1% with a 0-10V dimmer on 120 or 277-volt service DVOELN

Light Engine Color

- 2700K (CRI 90) 27K
- 3000K (CRI 90) 30K
- 3500K (CRI 90) 35K

Voltage: standard luminaire operates on either 120 or 277 service

Reflector Color and Detail	Overlap Flange	Trim Flush*
Semi-specular Clear.....	COL.....	CTF
Slightly diffuse Clear.....	VOL.....	VTF
Champagne Gold.....	GOL.....	GTF
Black.....	BOL.....	BTF

Other reflector finishes available on special order.

Overlap Flange continues reflector finish. White painted flanges and custom painted flanges are available on special order. Add WF (white flange) or CCF (custom color flange).

*Trim Flush reflector trim requires the use of a plaster ring Accessory (see below).

ACCESSORIES

 Specify as a separate line item.

Plaster ring allows use of 5 7/8" OD Trim Flush (-TF) reflector in sheetrock ceiling; 6 3/16" dia hole required.....TF RING/5




PHOTOMETRIC REPORT (tested per IESNA LM-79-2008)

prorated from (LTL) Report No. 21291. Original Luminaire Testing Laboratories, Inc. (LTL) test reports furnished upon request.

Luminaire recessed LED round downlight with aluminum reflector
 Lamp Philips LED Fortimo DLM 2000, 3000K CCT
 Lamp Life rated 50,000 hours based on L70/B50 criteria. LM80 report by LED manufacturer furnished upon request
 Spacing Criteria 1.12

CANDLEPOWER DISTRIBUTION

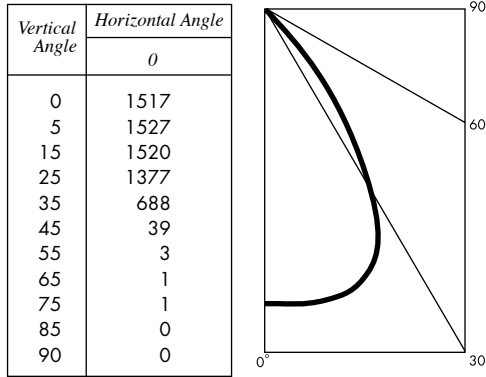

DRIVER INFORMATION *UL Class 2, dry and damp location*

Voltage	120	277
Input Watts (1100/1500/2000 lumens)	13/17/24	13/17/24
Input Current (A) (1100/1500/2000 lumens)	.11/.14/.20	.05/.06/.09
Min. Power Factor	>0.95	>0.95
Operating Temperature Range (F)	-4 to 122	-4 to 122

ZONAL LUMEN SUMMARY

Zone	Lumens	% Fixture
0 - 30°	1193	70.8
0 - 40°	1617	96.0
0 - 60°	1682	99.9
0 - 90°	1684	100.0
90 - 180°	0	0.0
0 - 180°	1684	100.0

COLOR MULTIPLIERS

Semi-specular Clear (C)	1
Slightly diffuse Clear (V)	.95
Champagne Gold (G)	.95
Black (B)	.49

LIGHT OUTPUT MULTIPLIERS

(based on 2000 lumens LED)

LED Light Engine	Light Output Multiplier		
	2700K	3000K	3500K
L11	0.57	0.59	0.61
L15	0.76	0.79	0.82
L20	0.96	1	1.03

LUMINANCE DATA

Vertical Angle	Candelam ²
45	4289
55	441
65	199
75	326
85	0

LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire Efficacy (lms/watt)	Luminaire Light Output	Luminaire Efficacy (lms/watt)	Luminaire Efficacy (lms/watt)		System Wattage
	2700K		3000K		3500K		
L11	960*	73*	994*	76	1027*	79*	13
L15	1280*	75*	1330*	78*	1381*	81*	17
L20	1617*	67*	1684*	70*	1735*	72*	24

*estimated values