

Project

Type



MADE IN USA

Click Here

Date

Product Code

Designer

# EPIC WAFER/4 AA EE

recessed shallow IC LED accent light

FULLY SUSTAINABLE – FULLY SUSTAINABLE – FULLY SUSTAINABLE – FULLY SUSTAINABLE – FULLY SUSTAINABLE – FULLY SUSTAINABLE – FULLY SUSTAINABLE



## FEATURES

- EPIC WAFER/4 AA EE is a 4" aperture, high efficacy, LED accent light (EE) designed for insulation contact (IC) and certified airtight under ASTM E283. Recess depth is only 4 5/8".
- Luminaire provides 365° rotation and 0°-30° angular adjustment. Once focused, adjustment may be locked by a lever and a thumb nut.
- Luminaire employs an internal spring-loaded lens to produce an initial beam-spread of either 12°, 20° or 36°. To allow beam-spread to be changed in installed luminaires, internal lenses are available as accessories.
- Luminaire is powered by one of a number of Cree Chip on board LED's. See below for wattages and efficacies.
- External reflectors, cut at 15°, are available in three clear natural aluminum colors – semi-specular (C), slightly diffuse (V) or fully diffuse (EC) – as well as champagne gold, black Alzak® and specular white enamel. Other finishes are available on special order.
- EPIC WAFER/4 AA EE includes a pair of residential mounting bars extendable to 20" and designed for use in wood joists.
- For more information, [click here](#).

## APPLICATIONS

Luminaire is listed for direct contact with insulation, certified airtight under ASTM E283, and suitable for damp location. Luminaire is prewired, suitable for use in a fire rated ceiling, and approved for #12 wire 75° C branch circuit wiring. Removal of the external reflector allows access to the LED module and junction box.

For a version of this luminaire designed to provide greater shielding of the light source, see [EPIC WAFER/4 AA ES](#).

## PRODUCT CODE

For complete product code, list basic unit and select one item from each following box.

Basic Unit ..... W4IC-CLTAA

Internal Lens *Choose one.*

12° initial beam-spread ..... - 12D  
 20° initial beam-spread ..... - 20D  
 36° initial beam-spread ..... - 36D

Light Source Output (Lumens)

800 lumens / CRI 90+ ..... 2700K & 3000K only ..... - L08H  
 1000 lumens ..... 2700K & 3000K only ..... - L10H  
 1200 lumens ..... 2700K & 3000K only ..... - L12H  
 1000 lumens / CRI 80+ ..... - L10S  
 1200 lumens ..... - L12S  
 1500 lumens ..... - L15S

Driver

dimmable to 1% by a 0-10V dimmer on 120 Or 277-volt service ..... - DMV  
 dimmable to 5% by either an incandescent or electronic low voltage dimmer only; 120-volt service only ..... - DMP  
 dimmable to 1% by a 2-wire Lutron compatible dimmer ..... - DMI-LU  
 dimmable to 1% SoftOn/FadeToBlack by a Lutron EcoSystem control ..... - ECO-LU  
 eldoLED 0-10V (Logarithmic) driver dimmable to 0.1% with a 0-10V dimmer ..... - DV0ELG  
 eldoLED 0-10V (Linear) driver dimmable to 0.1% with a 0-10V dimmer ..... - DV0ELN  
 eldoLED driver dimmable to 0.1% with DALI control system ..... - DAO-EL  
 Moons' driver dimmable to 0.1% by DMX controllers ..... - DX0-MN

Light Color

2700 K ..... - 27K  
 3000 K ..... - 30K  
 3500 K ..... - 35K  
 4000 K ..... - 40K

External Reflector Color and Trim

Overlap

Trim Flush\*

Semi-specular Clear ..... EE-COL ..... EE-CTF  
 Slightly diffuse Clear ..... EE-VOL ..... EE-VTF  
 Fully diffuse Clear ..... EE-ECOL ..... EE-ECTF  
 Champagne Gold ..... EE-GOL ..... EE-GTF  
 Black ..... EE-BOL ..... EE-BTF  
 White ..... EE-WOL ..... EE-WTF

Standard reflector flange continues reflector finish. White painted flanges and custom painted flanges are available on special order. Add WF (white flange) or CCF (custom color flange).

\*Trim Flush reflector trim requires the use of a **plaster ring** Accessory (see below).

## OPTIONS

Specify by adding to the basic unit.

0° cut **downlight reflector** ..... - 0

## EXTRA INTERNAL LENSES

Specify as separate line items.



12° internal lens ..... CLT-LENS12-50  
 20° internal lens ..... CLT-LENS20-50  
 36° internal lens ..... CLT-LENS36-50

## ACCESSORIES

Specify as a separate line item.

**Plaster ring** allows use of 4 7/8" OD Trim Flush (-TF) reflector in sheetrock ceiling; 5 3/16" dia hole required ..... TF RING/4



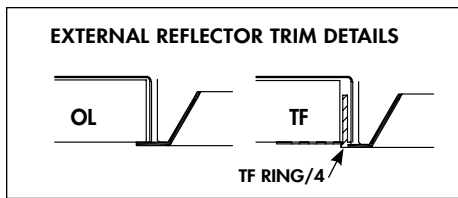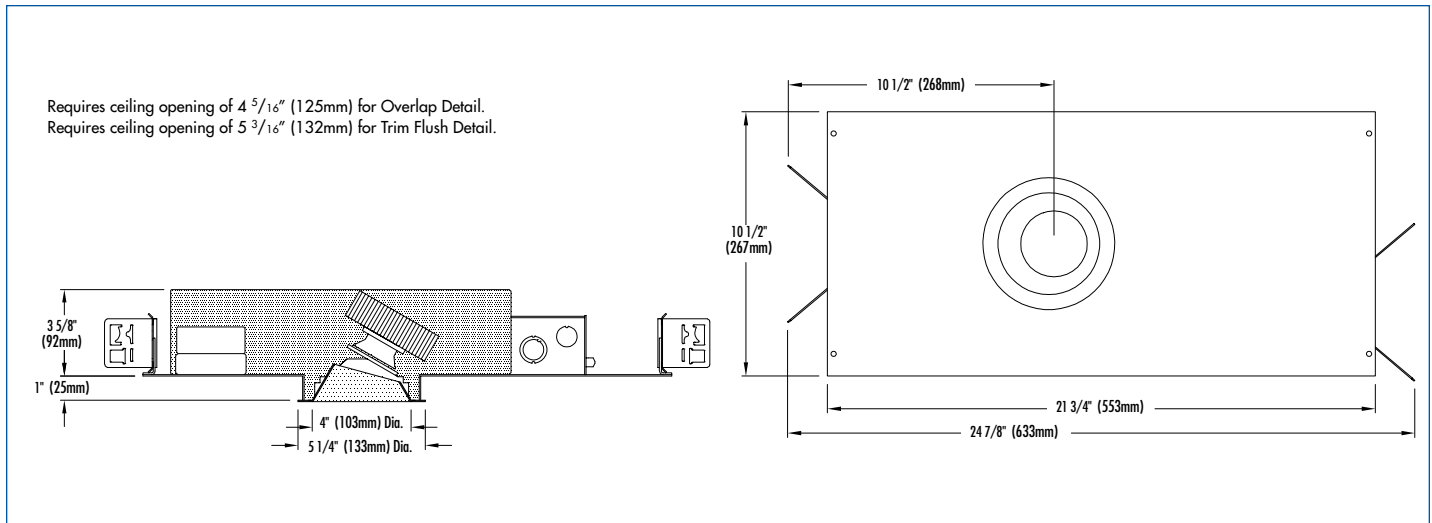

**STANDARD DMV DRIVER INFORMATION** (UL Class 2, dry and damp location)

Voltage	120	277
Input Watts (L08H/L10H/L12H/L10S/L12S/L15S)	9/10/13/9/10/13	9/10/13/9/10/13
Input Current (A) (L08H/L10H/L12H/L10S/L12S/L15S)	08/08/11/08/08/11	03/04/05/03/04/05
Output Current (mA)	350-700	350-700
Min. Power Factor	.99	.99
Operating Temperature Range (F)	-13 to 122	-13 to 122

**LIGHT OUTPUT MULTIPLIER**

LED Light Engine	Light Output Multiplier
800 Lumens 90 CRI	0.65*
1000 Lumens 90 CRI	0.78*
1200 Lumens 90 CRI	1
1000 Lumens 80 CRI	0.81*
1200 Lumens 80 CRI	0.96*
1500 Lumens 80 CRI	1.20*

\*estimated values

**REFLECTOR COLOR MULTIPLIERS**

Slightly diffuse clear (V)	1
Fully diffuse clear (EC)	.90
Champagne gold clear (G)	1
Specular white (W)	.70
Black (B)	.40

– photometrics continued below –




## PHOTOMETRIC REPORT with 12° lens (tested per IESNA LM-79-2008)

Verification Services Report No. 11827425.01. Original test report furnished upon request.

Luminaire ..... recessed LED round accent light with semi-specular clear aluminum external reflector; LED aimed at 15° above vertical.  
 Light Source ..... Cree CXB1310 LED with 12° beam spread integral lens, 2700K CCT, 90 CRI, 1200 lumens

### CANDLEPOWER DISTRIBUTION (Candela)

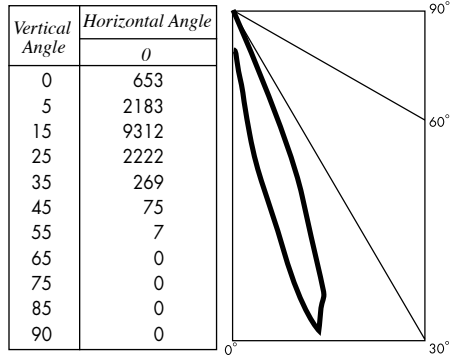

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Light Engine	Luminaire Light Output	Luminaire CBCP	Luminaire Efficacy (lms/watt)	System Wattage	RX Light Output (90 min. run)
800 Lumens 90 CRI	520	6053*	71*	9	414*
1000 Lumens 90 CRI	624	7263*	77*	10	414*
1200 Lumens 90 CRI	800	9312	62	13	414*
1000 Lumens 80 CRI	648	7543*	89*	9	503*
1200 Lumens 80 CRI	768	8940*	95*	10	503*
1500 Lumens 80 CRI	960	11174*	91*	13	503*


\*estimated values

## PHOTOMETRIC REPORT with 20° lens (tested per IESNA LM-79-2008)

Verification Services Report No. 11827425.03. Original test report furnished upon request.

Luminaire ..... recessed LED round accent light with semi-specular clear aluminum external reflector, LED aimed at 15° above vertical.  
 Light Source ..... Cree CXB1310 LED with 20° beam spread integral lens, 2700K CCT, 90 CRI, 1200 lumens

### CANDLEPOWER DISTRIBUTION (Candela)

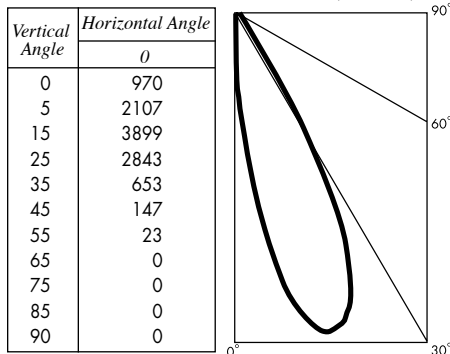

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Light Engine	Luminaire Light Output	Luminaire CBCP	Luminaire Efficacy (lms/watt)	System Wattage	RX Light Output (90 min. run)
800 Lumens 90 CRI	537*	2534*	60*	9	347*
1000 Lumens 90 CRI	645*	3041*	64*	10	347*
1200 Lumens 90 CRI	827	3899	63	13	347*
1000 Lumens 80 CRI	670*	3158*	74*	9	422*
1200 Lumens 80 CRI	794*	3743*	79*	10	422*
1500 Lumens 80 CRI	992*	4679*	76*	13	422*


\*estimated values

## PHOTOMETRIC REPORT with 36° lens (tested per IESNA LM-79-2008)

Verification Services Report No. 11827425.05. Original test report furnished upon request.

Luminaire ..... recessed LED round accent light with semi-specular clear aluminum external reflector, LED aimed at 15° above vertical.  
 Light Source ..... Cree CXB1310 LED with 36° beam spread integral lens, 2700K CCT, 90 CRI, 1200 lumens

### CANDLEPOWER DISTRIBUTION (Candela)

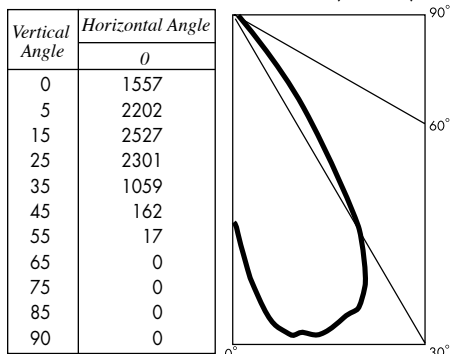

### LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Light Engine	Luminaire Light Output	Luminaire CBCP	Luminaire Efficacy (lms/watt)	System Wattage	RX Light Output (90 min. run)
800 Lumens 90 CRI	589*	1643*	65*	9	381*
1000 Lumens 90 CRI	707*	1971*	71*	10	381*
1200 Lumens 90 CRI	906	2527	70	13	381*
1000 Lumens 80 CRI	734*	2047*	82*	9	462*
1200 Lumens 80 CRI	870*	2426*	87*	10	462*
1500 Lumens 80 CRI	1087*	3032*	84*	13	462*

\*estimated values