


INSTALLATION INSTRUCTIONS

installation

This fixture is  listed and should be installed in accordance with the National Electrical Code and local regulations.


- **Disconnect mounting plate from luminaire housing by removing two nuts. Save nuts.**
- **Install mounting plate onto a 3½" or 4" octagonal outlet box (supplied by others).**

Note: IF FIXTURE IS TO USE WALLWASH (WW) REFLECTORS install mounting plate so that one of its four 'arrows' points toward the wall to be illuminated.

- **Splice luminaire leads to electric service wires; stuff splices into outlet box through hole in mounting plate.**
- **Reattach housing to mounting plate: Position housing so that mounting studs pass through and protrude from housing plate. Screw two saved nuts onto mounting studs.**

When the space is free of construction dust and debris, install reflector.

- **Wallwash reflector:** Orient reflector with the specially shaped portion farthest from the adjacent wall AND align the four reflector mounting springs with the four reflector mounting slots. Then, press reflector, evenly, up into housing.
- **Downlight reflector:** Orient reflector in any manner that aligns the four reflector mounting springs with the four reflector mounting slots. Then press reflector, evenly, up housing.

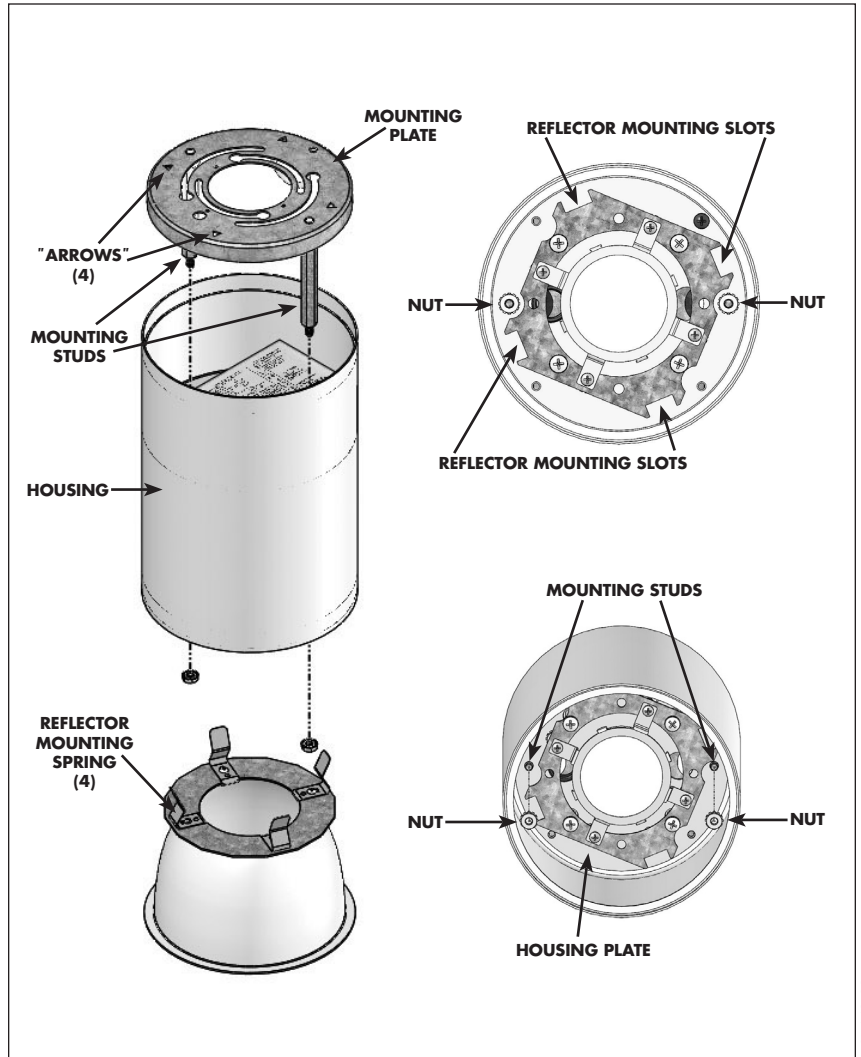

601442-00

maintenance

Lens may be cleaned with non-abrasive window washing product and a damp, soft lint-free cloth. To remove fingerprints or dirt on housing, wash with a solution of dishwashing detergent and water, rinse and dry with a soft lint-free cloth.