

THREE PWG AA

recessed accent light

FEATURES

- **Three PWG AA is a 3" aperture accent light** designed for use with a Philips 12-volt, GU5.3 base, MR-16 shaped, 'WarmGlow' retrofit LED lamp (supplied by others).
 - Philips WarmGlow 6.5MR16...
- **This lamp dims from 2700K to 2200K**, providing an experience similar to the dimming profile of an incandescent lamp.
- **Conical reflector, cut at 15°, minimizes aperture brightness.** Fixture provides 365° horizontal rotation and 0 – 40° angular lamp adjustment. Recess depth is only 6".
- **The fixture provides easy one-finger adjustment of both tilt and rotation after lamping.** Once focused, the adjustment can be locked in place by means of a lever and a wing nut.
- **Fixture accepts one or two of a number of [Optical Accessories](#)** including lenses, screens and color filters.
- **Standard reflectors are cut at 15°.** A reflector cut at 25° is available as an option. Reflectors cut at 25° are recommended for tilting the lamp between 30° and 40°.
- **Reflectors are available in three clear natural aluminum finishes** — semi-specular (C), slightly diffuse (V) or fully diffuse (EC) — as well as champagne gold or black Alzak®. Other reflector finishes are available on special order.
- **Fixture includes a pair of mounting bars (3/4" x 27" C channel).** Specialty bars for wood joist and T-bar installations are also available.
- **For more information, [click here](#).**

APPLICATIONS

Fixture is recommended for directional accent and display highlighting in stores, offices, museums, restaurants, showrooms, residences and hotels.

Fixture is listed for Damp Location. Fixture includes an integral electronic transformer suitable for 120-volt service only. Fixture



is prewired with thermal protector, suitable for use in a fire rated ceiling and approved for ten #12 wire 90°C branch circuit pull-through wiring.

Removal of the reflector allows access to the transformer and junction box.

LIGHTPLATES

LightPlates may be used instead of standard reflectors.



LIGHTPLATE DOWNLIGHT SPOT

straight-cut baffle for downlighting



LIGHTPLATE ACCENT SPOT

angle-cut baffle for accent lighting




LIGHTPLATE ACCENT SLOT

angle-cut baffle for accent lighting

Lamp (By Others) Dimming Info

Edison Price Lighting does not include lamps and does not sell either lamps or their accessories. For dimming compatibility consult the lamp manufacturer's website.

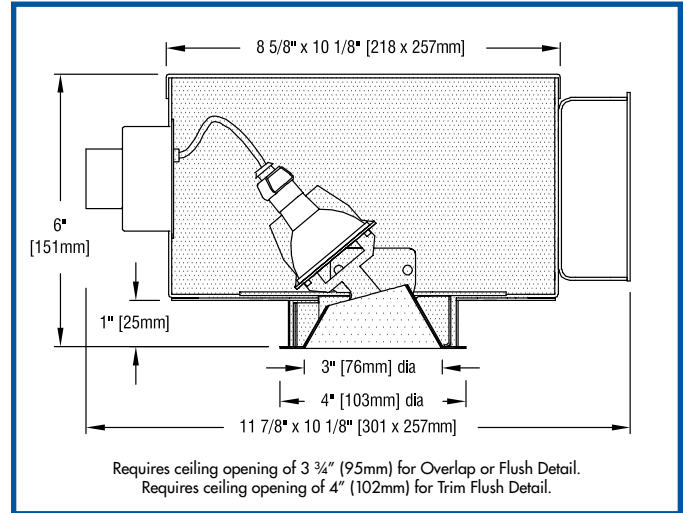

PRODUCT CODE

For complete product code, list basic unit and select one item from each following box.

Basic UnitTHREE-MRE-AA-PWG

Reflector Color and Detail	Overlap	Trim Flush*
Semi-specular Clear.....	COL	CTF
Slightly diffuse Clear.....	VOL	VTF
Fully diffuse Clear.....	ECOL	ECTF
Champagne Gold	GOL	GTF
Black	BOL	BTF
Other reflector finishes available on special order.		

Standard reflector flange continues reflector finish. White painted flanges and custom painted flanges are available on special order. Add WF (white flange) or CCF (custom color flange).

*Trim Flush reflector trim requires the use of a **plaster ring** Accessory (see below).

▶ Reflectors detailed for metal or wood ceilings available on special order.

LightPlates may be ordered instead of the standard reflectors above.

LightPlate Downlight Spot , white	DP3-OL.....	DP3-TF
LightPlate Accent Spot , white	AP3-OL	AP3-TF
LightPlate Accent Slot , white	AL3-OL.....	AL3-TF
Custom painted trims for LightPlate are available on special order. Add -CC		

OPTIONS Specify by adding to the basic unit.

25° cut reflector (standard reflector is 15° cut)-25

ACCESSORIES Specify as a separate line item.

Plaster ring allows use of 3 3/4" OD Trim Flush (-TF) reflector in sheetrock ceiling; 4" dia hole required.....TF RING/3

OPTICAL ACCESSORIES ▼ See next page



OPTICAL ACCESSORIES

Specify as separate line items. All are 2 3/8" (60mm) diameter. Lenses and filters are glass; screens are aluminum.

diffuse glass	DGS/2.375
prismatic lens	PLS/2.375
55° spread lens	LENS/2.375
40° x 70° spread lens	LENS/2.375-4070
beam smoother	CLR/2.375
33% light reduction screen	SCR33/2.375
50% light reduction screen	SCR50/2.375

color filters	
surprise pink	PNK/2.375
daylight blue	DAY/2.375
amber	AMB/2.375
blue	BLU/2.375
green	GRN/2.375
red	RED/2.375

For current lamp performance data, consult lamp manufacturer's website.