

MINIMAX™ O LH BLUETOOTH

track mounted addressable LED open-aperture accent light



- Luminaire is equipped with a Xicato XIM Gen4 LED module, an IOT device with embedded micro-processor and Bluetooth Low Energy chip, controllable via a smart device with iOS or Windows based apps. Features include
 - standard Bluetooth Wireless connectivity
 - addressable individually
 - on/off control
 - dimming to 0.1%
 - data collection and storage for power consumption and LED performance
 - direct listening to switches and sensors
 - embedded Eddystone, iBeacon and/or AltBeacon beacons
- Luminaire may be configured to mount to any of eighteen 20-amp, 120-volt [track systems](#) – or – to any of six 277-volt track systems.
- Quick Change Cartridge accepts one or two [Optical Accessories](#), including spread lenses, color filters and screens. A complimentary Beam Smoother is included.
- Beam spread is changed by removing the Quick Change Cartridge, replacing one 'twist and lock' [reflector](#) with another, and replacing the cartridge. Luminaire is ordered with a single reflector; one or both of the other reflectors may be ordered as accessories.
- A concealed swivel provides 385° horizontal rotation and vertical adjustment from 0° to 90°. The swivel is permanently tensioned, allowing the luminaire to remain fixed at any angle. Luminaire can be locked in place by depressing a hinged ('lever lock') bar so that it lies flush with the top of the housing. Lifting the lever lock frees the swivel.
- MiniMax luminaires have seamless aluminum housings and cast aluminum tops for lightweight durability and heat dissipation.
- For more information, [click here](#).

MiniMax O LH Bluetooth is a track mounted accent light powered by one of a number of Xicato XIM Gen4 19mm LED modules, all of which are distinguished by extraordinary color consistency (within 1x2-step MacAdam ellipse). See tables on the reverse for

PRODUCT CODE

For complete product code, list basic unit and select one item from each following box.

Basic Unit	MM-XIM-OH
Track Configuration	
120-volt track (e.g. SightLine)	- 2C
277-volt track (e.g. HighLine)	- HC
Finish	
white	- WH
black	- BL
Industrial Silver	- SI
custom color	- CC
Beam Spread Reflector (specify one to ship with fixture)	
21° spot	- 21D
43° flood	- 43D
60° wide flood	- 60D
Light Source Output	
1300 lumens / CRI 98 Artist	- 13A
1300 lumens / CRI 80+ standard	- 13S
1300 lumens / CRI 80+ Vibrant	- 13V
Light Color	
2700 K	- 27K
3000 K	- 30K
3500 K	- 35K
4000 K	- 40K
Circuit Limitations	
Luminaire operates only on track circuits with <u>no</u> dimmer on the circuit	

► For luminaires modified for 50A or 60A track systems, contact factory.

EXTRA REFLECTORS *Specify as separate line items.*

21° spot reflector	XTM-REF21-70
43° flood reflector	XTM-REF43-70
60° wide flood reflector	XTM-REF60-70

USB Key
To address this fixture from a Windows-based PC, laptop or tablet, a USB key (dongle) is required. Contact factory for USB key.

OPTICAL ACCESSORIES ▼ *See next page*

For the outlet box mounted version of this luminaire, see [MiniMax O LH-OBM Bluetooth](#).




OPTICAL ACCESSORIES

Specify as separate line items.

All are 2 3/4" (70mm) dia. Lenses and filters are glass; screens are aluminum.

diffuse glass	DGS/2.75
prismatic lens (Solite)	PLS/2.75
55° spread lens	LENS/2.75
40° x 70° spread lens	LENS/2.75-4070
beam smoother included with fixture	CLR/2.75
color filters	
Daylight Blue	DAY/2.75
Surprise Pink	PNK/2.75
amber	AMB/2.75
blue	BLU/2.75
green	GRN/2.75
red	RED/2.75
33% light reduction screen	SCR33/2.75
50% light reduction screen	SCR50/2.75

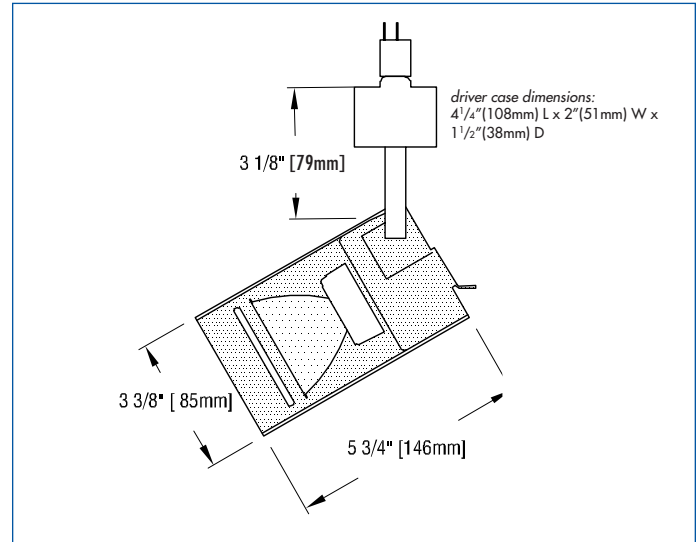

APPLICATIONS

Luminaire is suitable for highlighting vertical or horizontal surfaces, as well as objects in museums, galleries, showrooms, residences, offices and stores.

Luminaire is listed for mounting on Edison Price Lighting 120-volt or 277-volt track.

Fixture Spacing Requirements The track adapter of this fixture is 6" long. For this reason 1) it cannot be track-mounted closer than 6 1/4" on center and 2) it cannot be used with 2 of our 7 **Unicep** single-fixture track units.

– see below for photometric reports –



PHOTOMETRIC REPORT with 21° reflector (tested per IESNA LM-79-2008)


Prorated from Verification Services Report No. 1139429. Original test report furnished upon request.

Luminaire track-mounted LED accent light with a 21° reflector and black lens holder (NO LENS)

Lamp Xicato XIM19 LED Module, 1300 lumens, 3000K

Lamp Life rated 50.000 hours based on L70/B50 criteria. LM80 report by LED manufacturer furnished upon request

CANDLEPOWER DISTRIBUTION (Candela)

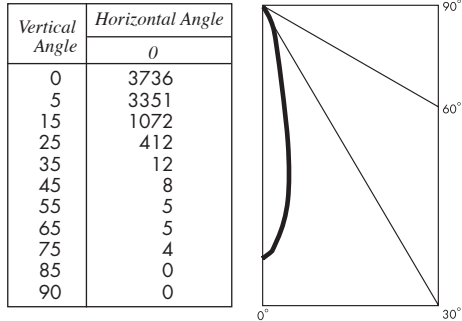

LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire Efficacy (lms/watt)	System Wattage
1300 Lumens Artist	814	43*	19
1300 Lumens standard & Vibrant	814	54*	15

*estimated values


PHOTOMETRIC REPORT with 43° reflector (tested per IESNA LM-79-2008)

Prorated from Verification Services Report No. 1139430. Original test report furnished upon request.

Luminaire track-mounted LED accent light with a 43° reflector and black lens holder (NO LENS)

Lamp Xicato XIM19 LED Module, 1300 lumens, 3000K Lamp Life see above

CANDLEPOWER DISTRIBUTION (Candela)

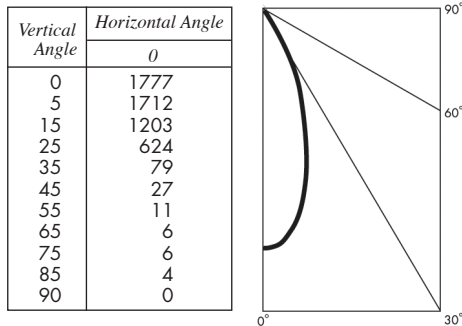

LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire Efficacy (lms/watt)	System Wattage
1300 Lumens Artist	864	45*	19
1300 Lumens standard & Vibrant	864	58*	15

*estimated values


PHOTOMETRIC REPORT with 60° reflector (tested per IESNA LM-79-2008)

Prorated from Verification Services Report No. 1139431. Original test report furnished upon request.

Luminaire track-mounted LED accent light with a 60° reflector and black lens holder (NO LENS)

Lamp Xicato XIM19 LED Module, 1300 lumens, 3000K Lamp Life see above

CANDLEPOWER DISTRIBUTION (Candela)

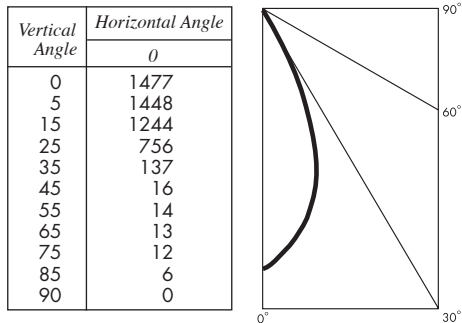

LUMINAIRE LIGHT OUTPUT AND EFFICACY

LED Module Type	Luminaire Light Output	Luminaire Efficacy (lms/watt)	System Wattage
1300 Lumens Artist	952	50*	19
1300 Lumens standard & Vibrant	952	63*	15

*estimated values

STANDARD DRIVER INFORMATION (UL Class 2, dry and damp location)

Voltage	120	277
Input Watts (I300A/I3S&V)	19/15	19/15
Input Current(A) (I300A/I3S&V)	.16/.13	.07/.05
Output Voltage (V)	48	48
Min. Power Factor	0.90	0.90
Operating Temperature Range (F)	-13 to 122	-13 to 122

LIGHT OUTPUT MULTIPLIER

LED Module Type	Light Output Multiplier
1300 Lumens Artist	1
1300 Lumens standard & Vibrant	1