


DARKLITE® 38E PM

surface mounted LED PAR 38 downlight

MADE-TO-ORDER • MAY NOT BE RETURNED FOR CREDIT • MADE-TO-ORDER • MAY NOT BE RETURNED FOR CREDIT

FEATURES

- **Darklite 38E PM is a 6" aperture downlight** which has been checked for fit and initial operation with two PAR 38 LED retrofit lamps (supplied by others):
 - KETRA S38; and
 - SORAA PAR38.
- **Fixture includes a 5 3/4" diameter reflector** – the smallest aperture possible that allows the lamp to be removed without removing the reflector. The reflector is precisely designed to minimize aperture brightness, with a shielding angle of 40°. Housing finish is matte white.

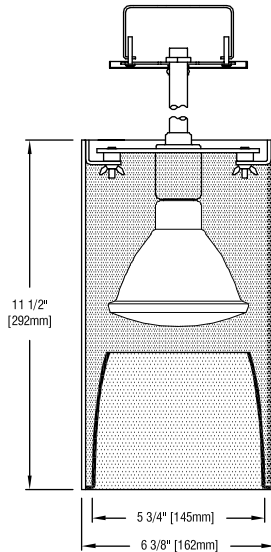

- **Reflector is available in three clear natural aluminum finishes** — semi-specular (C), slightly diffuse (V) or fully diffuse (EC) — as well as champagne gold or black Alzak®. Other reflector finishes are available on special order.



- **Fixture includes a reveal at the top of the housing** which serves as a vent for air drawn through the fixture.
- **Darklite 38E PM is designed for mounting on a 3/8 IPS pendant** (72" maximum length) secured to a standard 4" deep octagonal outlet box. Pendants – in three lengths – are available as accessories. Also available as accessories are three hardware kits for securing the pendant to the outlet box: a flat outlet box cover; a 1 5/8" deep canopy; and a swivel (40° tilt maximum) for sloped ceilings.
- **For more information, [click here](#).**

APPLICATIONS

Fixture is suitable for 120-volt electrical service, cULus listed for Damp Location and mounting on a 3/8 IPS pendant (72" maximum length) secured to a standard 4" octagonal outlet box (by others).

LAMPS BY OTHERS

Edison Price Lighting does not include lamps and does not sell either lamps or their accessories.

DIMMING

For dimming compatibility consult the lamp manufacturer's website.

WIRELESS LIMITATIONS

The wireless range of lamped fixtures will vary with lamp and site conditions.

PRODUCT CODE

For complete product code, list basic unit and select one item from each following box.

Basic UnitDL38PM

Reflector Color

- Semi-specular Clear.....-C
 - Slightly diffuse Clear.....-V
 - Fully diffuse Clear.....-E
 - Champagne Gold.....-G
 - Black.....-B
- Other reflector finishes are available on special order.

OPTION

custom color matte paint housing finish
(identify color in specification) CCH

PENDANT ACCESSORIES

All pendants 3/8 IPS (.675" OD reduced to .650 OD, 3/8 – 18 NPS thread); may be cut and rethreaded in the field.

- 18" pendant, white** 18XP
- same 18" pendant, **black** 18XPB
- same 18" pendant, **Industrial Silver** 18XPS
- same 18" pendant, **custom color** 18XPCC
- 36" high capacity pendant, white** 36XP
- same 36" pendant, **black** 36XPB
- same 36" pendant, **Industrial Silver** 36XPS
- same 36" pendant, **custom color** 36XPCC
- 72" high capacity pendant, white** 72XP
- same 72" pendant, **black** 72XPB
- same 72" pendant, **Industrial Silver** 72XPS
- same 72" pendant, **custom color** 72XPCC

HARDWARE ACCESSORIES

For use with 3/8 IPS pendant in a 3 1/2" x 3 1/2" x 1 1/2" deep octagonal outlet box.

- outlet box cover kit, white**, flat 4 1/2" (114mm) UNIT/OBC
- same cover, **black** UNIT/OBCB
- same cover, **Industrial Silver** UNIT/OBCS
- same cover, **custom color** UNIT/OBCCC
- canopy kit, white**, 5" (127mm) dia x 1 5/8" (41mm) deep UNIT/CPY
- same canopy, **black** UNIT/CPYB
- same canopy, **Industrial Silver** UNIT/CPYS
- same canopy, **custom color** UNIT/CPYCC
- swivel kit, white**, 4 1/2" (114mm) dia; 40° max sloped ceiling... UNIT/SVL
- same swivel, **black** UNIT/SVLB
- same swivel, **Industrial Silver** UNIT/SVLS
- same swivel, **custom color** UNIT/SVLCC



For current lamp performance data, consult lamp manufacturer's website.